



2020 | TRAVEL TRAILERS A REV GROUP BRAND



## QUALITY TAKES TIME

The word *quality* is thrown around a lot these days. We know because we have been in business since 1965. Many things have changed over the years and while we certainly have evolved, we have always focused on maintaining our values.

The culmination of our 55-year journey is reflected in our current ultra-light Travel Trailer line featuring our computer designed and cut automated manufacturing process with composite construction materials and an emphasis on green manufacturing.

We've put in the time... so you can spend quality time.









shown in Mystic Shores



2075 shown in Royal



with optional exterior rear kitchen and mountain scene graphics.













shown in Java **2445** 

**1985** shown in ROADSTER



**1685** shown in PASSAGE

## **MAPLE**

1685 | 1985 | 1995 | 2185 2285 | 2295 | 2375 | 2465





2375 shown in MYSTIC SHORES

## **DRIFTWOOD**

1475 | 1575 | 2075 | 2445





**1575** shown in ROYAL



**1475** shown in PLATINUM



2445 shown in JAVA

### **AVAILABLE AMENITIES**



60" X 80" Residential Queen Beds



Exterior Kitchens



Comfortable Chairs



Bunk Beds

## **SPECIFICATIONS, STANDARDS & OPTIONS**

	1475	1575	1685	1985	1995	2075	2185	2285	2295	2375	2445	2465
Floor Length	14' 10"	15' 9"	16' 6"	18' 9"	19' 2"	20' 3"	21' 2"	22' 6"	22' 6"	23' 6"	24' 11"	24' 11"
Overall Length	20' 4"	21' 1"	21' 0"	23' 3"	23' 8"	24' 9"	25' 8"	27' 0"	27' 0"	28' 0"	29' 5"	29' 5"
Overall Length w/Optional Ladder	N/A	N/A	21' 5"	23' 8"	24' 1"	25' 2"	26' 1"	27' 5"	27' 5"	28' 5"	29' 10"	29' 10"
Width (Exterior)	84 3/8"	84 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"	96 3/8"
Height (Exterior) w/Optional A/C	9' 10"	9' 10"	10' 1"	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"	10' 4"	10' 4"
Height (Interior)	78"	78"	78"	78"	78"	78"	78"	78"	78"	78"	78"	78"
Dry Weight* - Overall Weight	2600	2775	3980	4245	4265	TBD	4565	4930	4840	5030	5525*	5675
Axle Weight* – Towed Weight	2350	2530	3555	3695	3875	TBD	3810	4295	4160	4430	5000*	5015
Hitch Weight* - Hauled Weight	250	245	425	550	390	TBD	755	635	680	600	525*	660
Cargo Capacity* - Gear	1100	925	1520	1455	1435	TBD	1435	1470	1560	1970	2075*	1625
Available Axle Capacity**	1150	970	2245	2105	1925	TBD	2390	1905	2040	2570	2800*	1985
GAWR (Per Axle)	3500	3500	2900	2900	2900	2900	3100	3100	3100	4000	3900*	4000
GVWR	3700	3700	5500	5700	5700	5700	6000	6400	6400	TBD	7600	TBD
Fresh Tank (Gal)	26	26	45	45	45	45	45	45	45	45	45	45
Gray Tank (Gal)	26	26	45	45	45	45	45	2/45	45	45	2/45	45
Black Tank (Gal)	26	26	45	45	45	45	45	45	45	45	45	45
Propane Tank (#/Gal)	1/5	1/5	2/5	2/5	2/5	2/5	2/5	2/5	2/5	2/5	2/5	2/5
Sleeping Capacity (Min./Opt. Max.)	2/3	4	5	4	4	4	7	4/6	4	4/5	8	5
Convertible Dinette Bed	Opt. 36" x 59"	46" x 78"	54" x 78"	54" x 78"	54" x 78"	40" x 80"	54" x 78"	54" x 78"	54" x 78"	42" x 78"	42" x 78"	42" x 70"

<sup>\*</sup> Estimates













Optional Sofa Bed

1985

<sup>\*\*</sup> When looking at cargo capacity you must consider the hitch weight of the trailer and axle capacity. Hitch weight is actually being hauled while the remaining Trailer weight on the axle(s) is being towed. Example if a trailer has a total weight of 4000 pounds with a 400 pound hitch weight that would mean 3600 pounds is on the axle(s). If the axle weight rating is 5200 for this unit you will have 1600 of axle capacity for cargo

















## **SPECIFICATIONS, STANDARDS & OPTIONS**

Control Care Control Capacity		1475	1575	1685	1985	1995	2075	2185	2285	2295	25/5	2445	Weight (lbs.)		1475	1575	1685	1985	1995	20/5	2285	2295	2375	2445	2465 Weigh
Purple   P	EXTERIOR													CONSTRUCTION/INSULATION											
		0	Ο	Ο	Ο	Ο	Ο	Ο	0	Ω	0 (	) (	n						. ,						•
Internal Stabilities and say Work Field   Service Stabilities		•	•	•	•	•	•	•	•	•	• •	•	•		•	•	•	•	• (		•	•	•	•	•
Marie Subblem Jacks when find		•	•	•	•	•	•			•	•	•				•			. ,		•		•		•
Exert Corporal action		•	•	•	•	•	•	•	•	•	•	•	•		•	•	•		• (		•	•	•	•	•
Receive Fig. 19   10   10   10   10   10   10   10			-	0	0	0	0	0	0	0	0 (	) (	20		•	•	•	•			•	•	•	•	•
AAAM Internation Workshort Strategory Raided Trees		Ω	Ω	0	0					-					•	•	•	•	• (		•	•	•	•	•
Alt Melement Place (protection of the control of th	,					-		-	-						•	•	•		. ,		•	-	•	•	•
Span Time	( )									_					0	0	0	0 1	0 (	) ()	Ω	0	0	0	0 32-40
Section   Storage   Stor	,	17	17	•	•	•	•	•	•	•	• 10		•	•	- 0	0	0	0	5	, ,	0	0		- 0	0 02 40
Specifie	1 0	•	•	•	•	•	•	•	•	•	•		•	,											
	, ,	0	0	0	0	0	0	0	0	0	-		1 42-47		*	*			-	*					
INTERIOR   Provided	- Programme and the second sec	•	•	•	•	•	•	•*	•*	•	* (	•	•	water fleater bypass and winterizing valve ( wit bypass valve)											
Counters First 7 Steam Will Lighting - LED   Counter First 7 Ste	. ,	0	0	0	0	0	0	0	0	0	0 (	) (	17	INITEDIOD /DECOD											
Annother		•	•	•	•	•	•	•	•	•	•	•	•												
Pibergress Front Warp w/Formed PPo Looker Grawd Gardard and LP Bank Cover   Formed Avene LED bedrey w/Formed Welfact Side Pillars and Heigrards LED lighting	, , , , ,	•	•	•	•	•	•	•	•				•				-	-		0	-	-	-		-
Formack   Processing without   Processing   Processing without   Processing   Processing with processing   Processing   Processing with processing   Processing with processing   Proces		ır a		•	•	-		•	•	•	•						•		_						
Realis Full Force   Full Petron   Micros   Full Petron   Petro			÷		•					•							0	0 (			0	0	0		0
Radius Aprile Traneles Infection Hemospace Fund Hemospace (and Hemospace Fund Hem	3 3 3	1	Ť	•		•		•	•	•															
Radius Aprile Timed Thermopsine Euro Windows	,	,		•	_		_	•	•											-					
Lange Curried Fronter Window (Laminater)				<u> </u>		Ť				_			-	•	0	0			(	)				0	
Langer   Carrier   Carri	, ,	•	•				•					_									•				
Silice Out Fort Mail Window(s)	,	_			_			_					-		0										
LeD   Care   C		•	•	•	•	÷	•	•	•																
Roof Rack System				0	0	0	Λ	0	0	0	0 (	) (	10	, ,	•/2										20
EP   Tall Lights				0	0	0		_							•	•	•	•	•	•	•	•	•	•	•
Decidative Prior License Pate   John Whitelloer   Radius Connered Storage Compartment Doors		_		0	0	0	0	0	•	•	0 (	, ,	J 33		•	•	•	•	• •	•	•	•	•	•	•
Padius Connerod Storage Compartment Doors	•	•	•	•	•	÷	÷	•	•	•					•	•	•	•	• •	•	•	•	•	•	•
Sam Latch on Pass-Thru Storage Compartment Door		•	•	÷	•	•	•	•	•				•	Euro-Ply Cabinet Construction	•	•	•	•	• •	•	•	•	•	•	•
Regided-Alike Entry and Storage Compartment Doors	• 1	•	•	•	•	•	•	•	•	•				Valance Boxes w/Lambrequins			•	•	• •		•	•	•	•	•
Radius Entry Door w/Tinted insulated Dualpane Window and Strutt Hinge Keyless Entry		_		÷	•	•	÷	•	•	•	•			Valances Attached to Interior Window Treatment	•	•			•	•					
Composition   Deciding Area	, , , , , , , , , , , , , , , , , , , ,	•	•	•	•	•	•	•	•	•				Mini-Blind(s) in Galley			•	•	•	•	•	•	•	•	•
Control   Cont		^	^	0	_	_	^	0	0	0	0 (	`	2	Day/Night Shades in Dinette and Bedroom w/Slow-Rise Feature			•	•	•	•	•	•	•	•	•
Entry   Living Area		0	U	U	0	0	U	0	0	0	0 (	)	J		•	•									
Skylight in Galley/Dinette Area		•	•	•	•	•	÷	•	•	•				Entry Door Pull Shade			•	•	• (	•	•	•	•	•	•
Exterior Wash Station		•	•	•	•	•	•	•	•	•			•	Hidden Trash Can Compartment							•		•	•	•
Exterior Kitchen		•	•	•	•	•	•	•	•	•	• •		•	Wall Clock	•	•	•	•	• (	•	•	•	•	•	•
Exterior Propane Connection  48" Portable Folding Table w/Built-In Exterior Storage Feature  Exterior LCD Mounting Puck w/Removable LCD Bracket  • • • • • • • • • • • • • • • • • • •		•	•	•	•	•	•	•	•	•	• ;		TDD	Key Hanger	•	•	•	•	• (		•	•	•	•	•
## Portable Folding Table w/Built-In Exterior Storage Feature    Exterior LCD Mounting Puck w/Removable LCD Bracket			_	_	_	_	0	_	_	•	- (														
Flush Mount' Stainless Steel 3-Burner Range w/Black Glass Cover   1/4" (1/30lb Limit)   1/30lb Limit)   1/30		•	•	•	•	•	•	•	•	•				GALLEY/APPLIANCES & EQUIPMENT											
Willing Receiver (1 1/4") (130lb Limit)				•	•	•	•	•	•				_	-					•						
Swing-Out Entry Assist Handle  O O O O O O O O O O O O O O O O O O O		•	•		•	•	•	•	•	0	0 (		0 05		0	0	0	0 (	n	0	Ω	0	0	0	0 44
Pull-Out Storage Tray         0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	, , , , , , , , , , , , , , , , , , , ,	0	0	0	0	0	-		-	-	-	) (	0 25	<u>~</u>	- 0	0	0	0 1	,		- 0	0		- 0	0 11
Awning Slide-Out Cover				•	•	•		. –			-		0.4		Λ	Λ	Λ	0 1	0 (	) ()	Λ	Λ	0	Λ	0 40
Refrigerator (Cu Ft) 3-Way Double Door   5   5		U					U			-		-				0	7								7
Electric Awning 13° 0" w/LED Lighting O Selectric Awning 16' 0" w/LED Lighting O Selectric Awning 18' 0" w/LED Lighting	•		_	U	U	U		U	U	U	0 (	)				5		-			-		-		-
Furnace BTU		U	U	^											- 0	J						_	-		-
Electric Awning 16' 0" / 6' 2" OTD (Over the Door) w/LED Lighting				U	_	_	_								1/10/	1/1/21/	2EV	25V 2	EV 1/	2V 25V	25/	25V	2EV	2EV	2EV
Electric Awrning 19' 0' w/LED Lighting  O  Stainless Steel Range Hood w/Light & Fan  Electric Awrning 19' 0' w/LED Lighting  O  Electric Awrning 20' 0' w/LED Lighting  O  Backsplash  Stainless Steel Range Hood w/Light & Fan  Electric Awrning 19' 0' w/LED Lighting  O  Backsplash  Stainless Steel Range Hood w/Light & Fan  Electric Awrning 20' 0' w/LED Lighting  O  Backsplash					0	0	0								14.3N	14.3N	20N								
Electric Awning 19' 0" w/LED Lighting 0 0 60 Electric Awning 20' 0" w/LED Lighting 0 0 62  Electric Awning 20' 0" w/LED Lighting 0 0 62  Electric Awning 20' 0" w/LED Lighting 0 0 0 62								_							_		U	•		, 0	0	0	-	0	0 41
Electric Awning 20' 0" w/LED Lighting 0 0 62 Backsplash • • • • • • • • • • •								0	_	^				U U	•	•	•			•	•	•	•	•	-
Elocatio / Winning 20 0 Wile De Eightung									0	-					•	•	•	-			_	•	•	•	•
Backup Camera w/Wireless Monitor 0 0 0 0 0 0 0 0 0 0 0 0 2														and the second s	•	•	•	•			•	•	•	•	
	Backup Camera w/Wireless Monitor	0	0	0	0	0	0	0	0	U	U (	) (	0 2	I Juling Galley Extension				•							

	1475	1575	1685	1985	1995	2075	2185	2285	2295	2375	2445	2465	Weight (lbs.)		75	1475	1685	1985	1995	2075	2185	2285	2295	2375	2445	Weight (lbs.)
Single Stainless Steel Sink (Round)	•	•	• • •	• • • • • • • • • • • • • • • • • • • •	•••	•		•					(1201)	LED Mood Lighting							•	•	•	•	•	•
Single "Undermount" Sink (Round)						•								Privacy Curtain			_				•	-		•	•	•
Residential "Undermount" Large Single Sink		Ť		•										Privacy Divider Door(s)			Ť				•	Ť	•	•	•	
Residential Single Lever Galley Faucet w/Pull-Out Sprayer		-	•	÷			•	•	÷	÷	•	•		r rivacy divider door(s)			_				_	_	_	•	•	
Sink Cover(s)	•	•	•	•	•	•	•	•	•	•	•	•		ELECTRICAL												
Magazine and Spice Racks			•	•	•	•	•	•	•	•	•	•														
														iN-Command						•					•	
FRESH AND WASTE WATER SYSTEM	46													Systems Monitor Panel	•	•	•		•		•	•	•	•	•	•
Water Pump w/In-Line Filter	'IJ .													12V/USB Charging Port(s)  Battery Condition Indicator - LED								_	•	•		•
Water Heater Gas/Electric/DSI		Ť	•	•		Ť		•	•	•	•	•		Lithium Battery (Up to 2)		0 0	) ()	0	) (	) ()	0	0	0	0	0	0 34 ea.
Water Heater Gas/Electric/DSi Water Heater Gas/Electric w/Boost Mode Feature (Truma Combi Eco)			•	Ť	•		•	•	•	•	•	•		Battery Controller	,	) 0	U	U	) (	0	-	U	0	-	0	U 34 Ca.
Tankless Water Heater		Ť	0	0	Λ	Ť	0	Λ	0	Λ	Λ	Λ	TBD	1500W Inverter						0					0	TBD
Enclosed, Insulated and Heated Fresh Water Tank	•	•	•	•	•		•	•	•	•	•	•	100	60 Amp Converter/Loadcenter			•	-				•	•		-	•
Envious distributed from Water fam.														45 Amp Converter/Loadcenter												
DATUDOOM														LED Interior Lighting - Ceiling				-				•	•	•		•
BATHROOM														LED Interior Lighting - Under Overheads			•	•		•	•	•	•	•	•	•
Marine Toilet - Foot Pedal - Porcelain			•	•	•	•	•	•	•	•	•	•		Decorative LED Lighting - S/O Ceiling		•				•	•	•	•	•		•
Marine Toilet - Foot Pedal - Plastic		•												Storage Compartment Lighting			•	•		•	•	•	•	•	•	•
Marine Toilet - Hand - Plastic	•													Single Battery Compartment		• •										
Black Tank Flush	•	•	•	•	•	•	•	•	•	•	•	•		Locking Dual Battery Compartment			•									•
Residential "Undermount" Oval Lavy Sink	•		•	•	•	_	•	•	•	•	_	•		Locking Dual Battery Compartment w/Sliding Tray				•			•	•	•	•	•	
Residential "Vessel" Lavy Sink						•					•			Battery Disconnect - Manual		• •	•	•			•	•	•	•	•	•
High Rise Single Lever Faucet			•	•	•	•	•	•	•	•	•	•		Wall Switched Lighting				•			•	•	•	•	•	•
Tub														LED Vanity Lighting Over Medicine Cabinet		•	•	•			•	•	•	•	•	•
Shower Pan Adjustable Slide Bar Shower Head Assembly		_	•	•	•	•	•	•	•	•	•	•		Pre-Wired for Roof A/C				•			•	•	•	•	•	•
Medicine Cabinet w/Mirror Door		•		•	_	•	•	•	•	_	•	•		A/C - Dometic 10K Low Profile w/Wall Control	(	0 0	0 (	0	) (	0 (	0	0	0	0	0	98
Mirror on Bath Door		·	•	•	•	•	•	•	•	•	•	•		A/C - Coleman 13.5K w/Wall Control	(	0 0	0 (	0	) (	0 (	0	0	0	0	0	98
Folding Lavy Extension	•		•	•	•	•	•	•	•	•	•	•		A/C - Coleman 13.5K w/Wall Control (Dual A/C)												0 196
Towel Rod on Wall			_				÷	•						A/C - Coleman 15K w/Wall Control	(	0 0	0	(	) (	) C	0	0	0	0	0	98
Towel Ring		_	•	_	•		•		•	•	•	•		Wall Thermostat			•	•		•	•	•	•	•	•	•
Residential Radius "Glass" Shower Door Enclosure			Ť		Ť	Ť	·	Ť		•	Ť	Ť		Pre-Wired for Fantastic Vent			•	•	•	•	•	•	•	•	•	•
Residential Radius "Soft" Shower Door Enclosure														Fantastic Roof Vent w/Remote	(	) 0	0	C	) (	0	0	0	0	0	0	0 10
Soft Radius Panel Shower Enclosure	•		•	_		•	_	_	_		_	_		Power Roof Vent in Bath			•	•	•	•	•	•	•	•	•	•
Shower Curtain w/Tieback			-		-									Pre-Wired for TV Ant/Park/Sat Cable		• •	•	4	•	•	•	•	•	•	•	•
Skylight - Dual Pane	•	•	•	•	•	•	•	•	•	•	•	•		TV Antenna HD			•	•	•	•	•	•	•	•	•	•
Ducted Heat	•		•	•	•	•	•	•	•	•	•	•		AM/FM/DVD Stereo w/Bluetooth App	•	• •	•	•	•	•	•	•	•	•	•	•
Sacration House														Portable Bluetooth Speaker	•	• •				•					•	
DINETTE														TV 24" (12 Volt) - Main Area						0						14
							_	_		_	_			TV 28" (12 Volt) - Main Area	(	0 0	. 0		C	1				_		16
Dinette w/Locking Pull-Out Storage Drawers			•	•	•		•	•	•	•	•	•		TV 32" (12 Volt) - Main Area				0	)		0	0	0	0		20
U-Shaped Dinette w/Euro Telescoping/360 Degree Adjusting Table Top		0				•							10	TV 40" (12 Volt) - Main Area												0 25
Roll-Out Storage Drawers													19	TV 19" (12 Volt) - Bedroom						0						12
														TV 24" (12 Volt) - Bedroom											0	14
BEDROOM														TV 28" (12 Volt) - Bedroom								0		0		16
Deluxe Queen Innerspring Mattress w/Pillow Top	•	•	•	•	•	•	•	•	•	•	•			TV 40" (12 Volt) - Bedroom												0 40
Deluxe King Innerspring Mattress w/Pillow Top												•		Electric Fireplace									0		0	0 26
Bedspread w/Throw Pillows	•	•	•	•	•	•	•	•	•	•	•	•		LED Patio Light - Switched	•	•	•	•	•	•	•	•	•	•	•	•
Convertible Sofa/Queen Bed				0	0		0						72	LED Hitch Light - Switched	•	, •	•	•	•	•	•	•	•	•	•	•
Bunk Beds (250 lbs. weight limit)							•/3				•/2			Solar on the Side Pre-Wire (Receptacle)			•			•	•	•	•	•	0	0 0
Bedmaid	0	0	0	0	0	0	0	0	0	0	0		14	Solar Panel Pre-Wire	(	0 0	-		, ,	, ,		-	-		-	0 2
Overhead Cabinet Bunk			•											Solar Panel/ 190w (Up to 2)	,	0 0	0	0	) (	0	0	0	0	0	0	0 25 ea.
Fold-Up Bunk Bed(s)							•				•			Exterior 12V/120V Patio Outlet and Entertainment Coax Cable Receptac	ie (	•	•	•	•	•	•	•	•	•	•	•
LED Reading Lights	•	•	•	•	•	•	•	•	•	•	•	•														

### **STANDARD FEATURES**



Rear bumper storage compartment provides space for your sewer hose or camp chairs 2075



iN-Command brings smart home technology to your RV by connecting you with many of the systems through an app. (2075, 2445)



Walk on roof allows for worry free maintenance. N/A 1475 & 1575



Large lockable dinette storage drawers utilize residential dovetail construction for strength. -N/A 1475, 1575, 2075



Exterior kitchen w/dual burners & sink take cooking duties outside. - 2295



100% LED lighting brightens your trailer and is easy on your power supply.



Magnetic exterior latches stay in place for hands free access.



Portable Bluetooth speaker keeps the tunes rolling in or out of the trailer. (1475, 1575, 2075, 2445)



Lance Life 4' exterior table. We all need one & this one doesn't waste space. N/A 1475, 1575, 2465



Electric cord and chain caddy. Keep these items off the ground.



Aluminum wheels & nitrogen filled USA manufactured Goodyear radial tires keep the good times rolling.



Exclusive Lance Load roof rack system safely stores your canoe, kayak, paddle boards...etc. – NA 1475 & 1575



Dometic Penguin II 10K low profile a/c runs on 2,200w generator allowing for off the grid cooling.



Electric fireplace provides ambiance & radiant heat. - 2295, 2445, 2465



Battery digital display monitors battery statistics like amp-hours consumed, state of charge, and voltage.



Convertible sofa bed turns your 60"x80" queen size bed into a comfortable couch. - Available 1985, 1995, 2075, 2185

### **OPTIONAL FEATURES**



Latitude power awning provides unobstructed shade with direct response wind sensor & LED light bar.



Pull out front storage tray organizes & provides easy access to your gear. - N/A 2465



Mountain Scene graphics give you a fresh look inspired by adventure.




Electric stabilizer jacks with foot pads make set up & teardown sweat free, keeping your trailer rock solid while parked. – N/A 1475 & 1575



Backup camera w/color display and sound makes backing up a safer, one-person job.



Tri-Five LP tanks allows extended off the grid use while an aerodynamic cover protects & conceals. - N/A 1475 & 1575

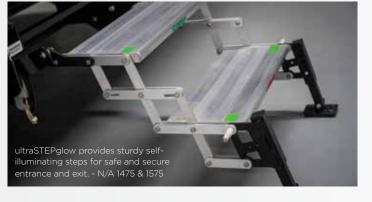



Keyless entry lets you adventure out without having to worry about your keys when you enter your trailer using a personalized code.



1 1/4" receiver gives you another area to haul your gear including bikes, skis, snowboards, etc. - Limit 130 lbs. - N/A 1475 & 1575



Lance exclusive Bed-Maid System with removable sheets & summer/winter sides provide a warm laundry friendly bedding alternative.

### **DESIGN & CONSTRUCTION**

- A. The roof is made of energy-star rated Polyvinyl Chloride (PVC) material with vents that clamp in place, eliminating screws and potential leaks. Integrated rain gutters and drip spouts prevent the sides of your trailer from streaking.
- **B.** Rigid block foam insulation yields maximum "R" value and promotes structural strength.
- C. Interior walls and cabinetry are constructed of Euro-Ply. This superior product is lighter, formaldehyde free and stronger. Providing both beauty and durability.
- D. Keeping it all together are stainless steel fasteners. Unlike our competitors, this expensive hardware resists corrosion making for a lasting investment.
- **E.** High gloss TPO lower front gravel guard with jewel LED lighting is both beautiful and resilient to the abuses of the road while protecting this section of the chassis.
- **F.** All seals use an anti-wicking material to prevent moisture from transferring to the laminate walls.

- G. Lance uses more expensive Azdel<sup>™</sup> in place of Luan wood, virtually eliminating mold and mildew. It's also lighter, carcinogen and formaldehyde free and has better "R" value for superior insulation.
- **H.** Lance's aluminum framed superstructure provides for an extremely solid trailer that is also lightweight.
- I. Heavy duty rubber torsionbar suspension axles allow for independent articulation, providing a better towing experience off-road in addition to featuring EX-lube bearing and self-adjusting brakes for easy maintenance.
- J. Engineered super lightweight, powder coated, tempered steel custom chassis Huck bolt construction eliminates weak and rust-prone welds.
- K. Slideout rooms feature smooth, dependable operation. Lighter in weight than other mechanisms, they're also smaller, allowing for more living space.
- L. The slick, high gloss fiberglass exterior walls are laminated under intense pressure with heat-setting adhesives for years of trouble-free service.



### **AWARDS**













### **ECO-SMART RV CONSTRUCTION**

Lance RVs are certified green based on an evaluation of our RV manufacturing facility, procedures and practices. Measured against criteria based on national consensus standards including resource efficiency, energy efficiency, water efficiency & indoor air quality.

CERTIFIEDGREENRVS.COM

## **BOONDOCKING**& OFF GRID CAMPING



Optional 2 5/8" lift kit offers additional ground clearance for your off the pavement adventures.



Optional 190w roof mounted solar panel (up to 2) keeps you and your accessories charged.



Standard torsion axle provides independent articulation of each tire allowing for a smoother ride.



Standard Solar on the Side SAE port accepts external aftermarket solar panels to keep your 12v system charged.



Standard HSLA e-coated frame protected against the mud, dirt and elements.



Optional solar panel charge monitor and automatic controller keep you informed. -Included with panel(s).





Optional lithium battery (up to 2) brings cutting edge battery technology to your RV.



Optional 1500w inverter allows your batterybased system to run conventional appliances by inverting 12V DC to create 120V AC output. (2075, 2445)



Portable generator storage compartment complete with tie down strap.

# 4 SEASONS CERTIFIED ALL WEATHER PACKAGE (OPTIONAL)



### **KEY FEATURES**



**Ducted heat** is routed into individually insulated holding tanks to keep them, the valves and PEX lines warm.



Water heater bypass & winterizing valves make draining the system for winter storage a breeze.



**Insulated hatch covers** add an additional layer of insulation to vents and sky lights.

## CALCULATING **TOWED WEIGHT** AND CARRYING CAPACITY

These are general guidelines to use when matching a trailer to your tow vehicle, assuming standard equipment on your trailer. Whether any travel trailer can be used with your vehicle and its capacities for carrying and/or towing is affected by how much optional equipment is added to the trailer, and the weight of passengers and all other items you carry in your tow vehicle and trailer.

To get an approximate weight of the model of your choice equipped with the optional features you are considering, the "Build Yours" feature at lancecamper.com is a great resource. Because we're unfamiliar with your tow vehicle, Lance makes no warranties or representation - expressed or implied - as to performance or reliability of your tow vehicle with a Lance trailer. For professional guidance, always consult with your Factory Authorized Lance Dealer. They're trained in calculating proper matches between tow vehicles and trailers.

### 3,500 POUND TOW RATING



Models: 1475, 1575

### 5,000 POUND TOW RATING



Models: 1475, 1575, 1685, 1985, 1995

### 6,000 POUND TOW RATING




Models: 1475, 1575, 1685, 1985, 1995, 2075, 2185, 2285, 2295

### 7,000 POUND TOW RATING



Models: 1475, 1575, 1685, 1985, 1995, 2075, 2185, 2285, 2295, 2375, 2445, 2465

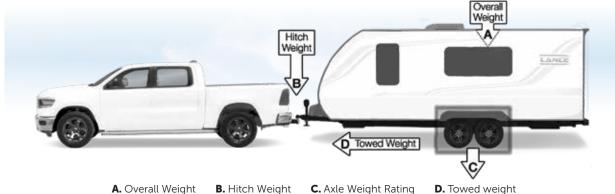

Hitch weight is actually being **hauled** while the remaining trailer weight is being towed.

#### A - B = D

Ex: If a trailer has an overall weight of 4k lbs. with 400 lbs. of hitch weight that would mean 3600 lbs. is on the axles and being towed.  $(4,000 - 400 = 3,600 \text{ or } \mathbf{D}$ . Towed Weight)

Cargo capacity must also consider hitch weight as well as axle weight rating.

### C - D = Cargo Capacity

**Ex.** If the axle weight rating is 5200 (2600 each x 2) for this unit you will have 1600 lbs. of axle capacity for cargo. (5,200 - 3,600 = 1,600 or Cargo Capacity)



Colton RV & Marine 3122 Niagara Falls Blvd North Tonawanda, NY 14120 (716) 694-0188 www.ColtonRV.com Colton RV & Marine
3443 Southwestern Blvd.
Orchard Park, NY 14127
(716) 957-3250
www.Coltonrv.com

Please see lancecamper.com/ warranty for details. 2020 LANCE TRAVEL TRAILER BROCHURE ©2019 Lance Camper Mfg. Corp. (LCMC). All rights reserved. Lance, the Lance logomark, the Lance logomark with chevron, The Lance Look, Lance Custom Design, Bed-Maid, LanceLock, ultraDECKplus, ultraSTEPplus, ultraSTEPglow, Discover The Lance Difference, Skyview, Lance Load, Lance Life, LIVE. LANCE. LIFE., REV Group® and other exclusive Lance product names, marks or designations are trademarks, service marks or registered trademarks of LCMC. All other marks are property of their respective owners. All product data, graphics and photography, illustrations and/or renderings in this book were as accurate as possible at press time. Subsequent refinements during the model year may be evident in the actual product. LCMC reserves the right to change prices, colors, materials, equipment and specifications without notice - as well as to add, modify or discontinue models shown in promotion materials and/or on its websites. All weights, fuel and liquid capacities are approximate and dimensions are nominal. It is the owner's sole responsibility to select the proper Lance model, tow vehicle and tow equipment for safe operation. Your Factory Authorized Lance Dealer can advise you of the operating parameters for your particular configuration, and can confirm prices and product specifications material prior to making your purchase decision. See website for full warranty information. GVWR (Gross Vehicle Weight Rating) is the maximum permissible weight of this fully loaded RV. Axle Rating is the maximum permissible loaded weight a specific axle is designed to carry. Overall length Is measured from tip of the hitch to rear bumper (excludes accessories). Excludes safety equipment and awnings. Actual propane capacity is 80% of water listing as required by the safety code. Brochure printed in the USA on FSM paper. 20K, 9/19, Rev. 1.5.