2018 HIGHLANDER BROCHURE

TOY HAULER TRAVEL TRAILERS & FIFTH WHEELS



TOY HAULER TRAVEL TRAILERS & FIFTH WHEELS

(TRAVEL TRAILER NOT SHOWN)



FLOORPLANS

TRAVEL TRAILERS



FIFTH WHEELS



HF350H

FEATURES

STANDARDS

- » 100" Wide Body Frame
- » Wardrobe & Linen Closet (FW)
- » Entrance to Main Bathroom from Bedroom (FW)
- » Secondary Bathroom (1/2 Bath) (FW)
- » 6'4" X 26" Entrance & Screen Door
- » 84" Slide-Out Ceiling Height (FW)
- » 12' 6" Garage (FW), 10' Garage (TT)
- » Insulated Garage Floor
- » Correct Track™ Suspension Alignment System
- » Stainless Steel Appliances (TT)
- » Dometic© Blizzard 15K A/C Quiet Residential Return
- » 8 Cu. Ft. Refrigerator (TT)
- » Washer/Dryer Prep
- » Generator Prep
- » Large Walk In Pantry (FW)


- » King Bed (FW), Queen Bed (TT)
- » Loft with 38" x 74" Mattress (FW)
- » 21" Oven with Flush Glass Stove Top (FW)
- » 17" Oven with Flush Glass Stove Top (TT)
- » Power Awning with LED Light & FLX Guard
- » 6 Point Auto Leveling with JT Strong Arm Stabilizers (FW)
- » Power Stabilizers (TT)
- » Heat & Massage In End Recliner Sectional
- » 30 Gallon Fuel Tank with Fuel Dispenser
- Patent Flush Floor Slides with Vinyl Flooring (No Carpet)
- » PVC Roof Material (12 year Warranty / 10 Year Non-Prorated)
- » Aluminum Entry Steps
- » 50 Amp Service (TT)
- » Night Roller Shades (FW)

OPTIONS

- » A/C 2nd A/C, 13.5k BTU Ducted (Master Bedroom)
- » A/C Garage A/C, 13.5k BTU Non-Ducted
- » Dual Pane Windows
- » Generator Gas Onan 5.5 KW
- » Happi-Jack Bed Lift with Pass-Through Dinette
- » Patio Ramp with Railings and Manual Awning

SPECIFICATIONS	HT31RGR	HF350H
Square Feet	324	385
UVW	10095	12500
Hitch Weight	1334	2905
GVWR	13330	16905
Cargo (Gross)	3205	4405
Length (Pin to Rear)	37'	39' 4"
Ext. Height	154"	157"
Ext. Width	100"	100"
Ext. Width (Slides Out)	162″	165″
Interior Height (Upper Deck)		98"
Interior Height (Overall)	83"-103"	76″
Fresh Water (Gal.)	106	110
Gray Water (Gal.)	62	98
Waste Water (Gal.)	31	82
LP Capacity (Ibs.)	60	60
Tire Size	16″	16″
Awning Size	19'	12', 14'

CONSTRUCTION

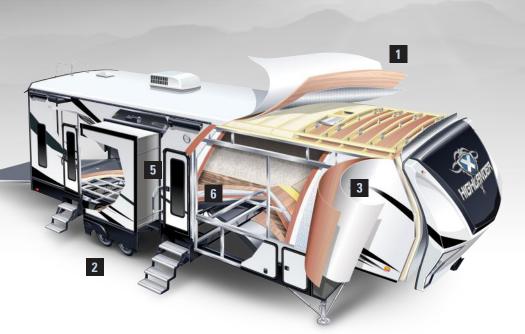

1 | ROOF

- » Double batten insulation layered with radiant foil
- » Screw-mounted plywood decking topped with premium quality PVC
- » No treatment required! Will not chalk or spot
- » Heat reflecting properties keep coach cooler in the summer

2 | SLIDE OUTS

- » Best in class slide height and depth
- » Flush floor and above floor slides
- » Accu-Slide cable system with four points of compression
- » Laminate components plus 3M flashing tape along corners to prevent leaks

3 | SIDEWALLS

- » Lightweight, double-welded aluminum walls
- » Slide roof frames laminated with rigid foam insulation

4 | MAIN BODY

- » Built with 12" steel I-beams
- » 7,000 lb. axles with self-adjusting brakes
- » Aluminum wheels with nitrogen-filled tires
- » Industry-leading unique heating system

5 | DOORS & LOCKS

- » Oversize entrance door with large window, built-in screen doors, and integrated window shades
- » Double-insulated passage and storage doors with slam latches on secure and convenient key-alike system

6 | FLOORS

- » Double-welded framed floors
- » Insulated with rigid foam wrapped in radiant foil, anti-puncture Darco material, and strengthened with an overlapping double layer of laminate
- » Insulated garage door

INDUSTRY-LEADING HEATING SYSTEM

Oversize 4-inch heat ducts run from the furnace down to the fully enclosed underbelly and wrap around the tanks suspended between the chassis I-beams. Holding tanks are warmed by the forced air heat which prevents freeze-ups.

A return at the end of the tank connecting back into the coach provides the necessary air flow, eliminating the need for a pressurized system.



Your Highlander Dealer:



Own the Outdoors

For more information visit us at: www.HighlandRidgeRV.com

Due to continual research and advances , manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error in the literature. Some items shown are not included as standard or optional equipment.