



Mesa Ridge
LITE



LIGHTWEIGHT TRAVEL TRAILERS & FIFTH WHEELS



Highland
RIDGE RV

Own the Outdoors

FLOORPLANS

TRAVEL TRAILERS



MR2410RL



MR2804RK



MR2504BH



MR2910RL



MR2510BH



MR3110BH



MR2710RL



MR3310BH



MR2802BH

FIFTH WHEELS



MF2910RL



MF2950BH

FEATURES

STANDARDS

- » 1/2 Ton Towable (FW)
- » 100# Full Extension Drawer Guides
- » 8 Cu. Ft. Refrigerator
- » LED Lighting in Ceilings (TT)
- » Quick Recovery Gas/Electrical Water Heater (TT)
- » Residential Return Air A/C - with Race Track Ducting (FW)
- » Prepped For Observation Camera
- » Key-Alike System
- » Aluminum Tread Entry Steps
- » Power Awning(s) with LED Lighting
- » Stainless Steel Appliances
- » Stainless Steel Under Mount Sinks (Kitchen & Lav)
- » Outside Enclosed Docking Station
- » Battery Disconnect
- » Solar Prep
- » Convertible Queen Mattress (60" x 80")
- » Seamless Surf(x) Counter Tops
- » Linoleum Throughout Main Living Areas & Slides
- » Patent Flush Floor Slides with Vinyl Flooring (No Carpet)
- » PVC Roofing Membrane (12 Year Warranty/10 Year Non-Prorated)
- » Porcelain Toilet
- » Walk Around Queen Bed with Best in Class Headroom (FW)
- » Heat Registers Strategically Placed (No Registers in Floor) (FW)
- » 50 Amp Service (FW)

OPTIONS

- » 50 Amp Serv. with 2nd A/C Prep (2710, 2802, 2804) (Forced 2910, 2950, 3110, 3310)
- » A/C - 2nd A/C, 13.5k BTU Ducted (must choose 50amp option) (2710, 2802, 2804, 2910, 3110, 3310)
- » A/C - Main 15k A/C ipo Std. 13.5k A/C
- » BBQ Grill with Bumper Bracket
- » Bike Rack - LCI Jack-It Front Bike Rack (TT)
- » Power Front and Rear Stabilizer Jacks
- » Recliners ipo Std. Theater Seats (2804)
- » Table/Chairs ipo Std. Booth (N/A 2504, 2510)
- » Tri-Fold Sofa ipo Std Power Theater Seats (N/A 2910)
- » U-Lounge ipo Std. Theater Seats/Booth (2950)

SPECIFICATIONS

	MR2410RL	MR2504BH	MR2510BH	MR2710RL	MR2802BH	MR2804RK	MR2910RL	MR3110BH	MR3310BH	MF2910RL	MF2950BH
Square Feet	222	232	233	262	267	260	300	315	331	317	320
UVW	5322	5385	5385	5710	5765	5900	6483	6835	6795	7840	8270
Hitch Weight	502	592	555	707	510	675	822	931	900	1305	1320
GVWR	7400	7400	7400	7400	7450	7675	8600	8995	8995	9995	9995
Cargo (Gross)	2078	2015	2020	1690	1685	1775	2117	2160	2200	2155	1725
Length (Pin to Rear)	28' 5"	28' 11"	29' 3"	31' 6"	31' 9"	31' 9"	33' 5"	35' 5"	37' 5"	31' 11"	34' 11"
Ext. Height	131"	131"	131"	131"	131"	131"	131"	131"	131"	151"	151"
Ext. Width	97"	97"	97"	97"	97"	97"	97"	97"	97"	97"	97"
Ext. Width (Slides Out)	135"	135"	135"	135"	135"	135"	156"	135"	135"	156"	156"
Interior Height (Upper Deck)	-	-	-	-	-	-	-	-	-	80"	80"
Interior Height (Overall)	82"	82"	82"	82"	82"	82"	82"	82"	82"	92"	92"
Fresh Water (Gal.)	51	51	51	51	51	51	51	51	51	51	51
Gray Water (Gal.)	29	29	29	29	58	58	58	29	58	58	58
Waste Water (Gal.)	29	29	29	29	29	29	29	29	29	29	29
LP Capacity (lbs.)	60	60	60	60	60	60	60	60	60	60	60
Tire Size	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"	15"
Awning Size	15'	18'	18'	20'	20'	20'	10, 11'	19'	20'	9', 11'	15'

CONSTRUCTION



1 | ROOF

- » Double batten insulation layered with radiant foil
- » Screw-mounted plywood decking topped with premium quality PVC
- » No treatment required! Will not chalk or spot
- » Heat reflecting properties keep coach cooler in the summer

2 | SLIDE OUTS

- » Best in class slide height and depth
- » Flush floor and above floor slides
- » Accu-Slide cable system with four points of compression
- » Laminate components plus 3M flashing tape along corners to prevent leaks

3 | SIDEWALLS

- » Lightweight, double-welded aluminum walls
- » Slide roof frames laminated with rigid foam insulation

4 | MAIN BODY

- » Class-leading I-beam chassis and draw bars
- » Equa-Flex suspension system
- » Axles with self-adjusting brakes
- » Aluminum wheels with nitrogen-filled tires
- » Industry-leading unique heating system

5 | DOORS & LOCKS

- » Full-width entrance doors with built-in screen doors and integrated window shades
- » Entrance and baggage doors on secure and convenient key-alike system


6 | FLOORS

- » Double-welded framed floors
- » Insulated with rigid foam wrapped in radiant foil, anti-puncture Darco material, and strengthened with an overlapping double layer of laminate

INDUSTRY-LEADING HEATING SYSTEM

Oversize 4-inch heat ducts run from the furnace down to the fully enclosed underbelly and wrap around the tanks suspended between the chassis I-beams. Holding tanks are warmed by the forced air heat which prevents freeze-ups.

A return at the end of the tank connecting back into the coach provides the necessary air flow, eliminating the need for a pressurized system.

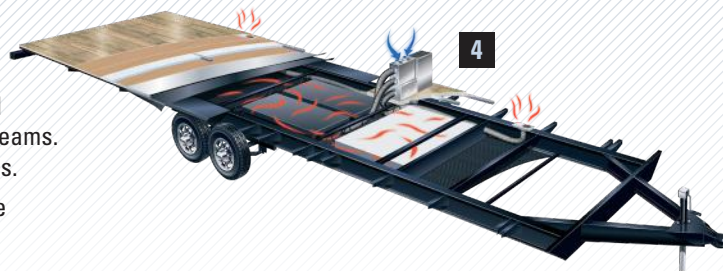

Your Mesa Ridge Lite Dealer:



Highland
RIDGE RV

Own the Outdoors

For more information visit us at:

www.HighlandRidgeRV.com

Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error in the literature. Some items shown are not included as standard or optional equipment.