## **145X** Heavy Duty Tandem Axle Extra Wide Gooseneck Dump •

G.V.W.R.	14,000#	Axles	(2) 7,000# EZ Lube w/Elec. Brakes	
G.A.W.R. (Ea. Axle)	A.W.R. (Ea. Axle) 7,000# Supen		Multi-Leaf Spring w/Equalizer	
Coupler	2-5/16" Adjustable Pipe	Tire	ST235/80 R-16 Load Range E	
Safety Chains	y Chains 3/8" Grd. 70 w/Safety Latch Hook (2 each) Wheel		16" x 6"; HD White Mod 8 Bolt	
Jack	Dual 12,000# Side Wind Drop Legs  Floor  10 Gauge Smooth Steel		10 Gauge Smooth Steel	
Neck	10" I-Beam Lights L.E.D. D.		L.E.D. D.O.T. Stop, Tail, Turn & Clearance	
Frame	8" x 3" Rectangular Tubing	Elec. Plug	7-Way RV	
Crossmembers	8" Channel	Finish (Prep)	Steel is Cleaned to Ensure a Professional	
Bed Crossmembers	3" Channel		Smooth Finish.	
Bed Long Sils	3" Channel	Finish	Superior Quality Finish is Applied for a	
Bed Side Rails	6-1/2" Formed Angle		Highly Decorative and Protective Finish.	
Fenders	Double Square Broke Diamond Plate			


#### Standard Features

- Lockable Pump & Battery Box Mounted in Front of
  Bed
- J-Hooks for Tie Down
- Fully Formed Shroud for Tarp
- Self Contained Electric/Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Combo Gate
- 24", 12 Ga. Sides
- 10 Ga. Floor
- Stake Pockets (Sides)
- EZ Lube Hubs
- Dexter Brand Axles
- 110V Charger

- (4) 5/8" D-Rings Inside Bed
- Név-R-Adjust Electric Brakes
- Cambered Axles
- Spare Tire Mount
- Diamond Plate Fenders
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Complete Break-A-Way System w/Charger
- Radial Tires
- 2" Square Tubing Top Rail
- Crank Style Roll Tarp- Standard Equipped

#### Description

	Weights & Capacities				
Length	Empty Weight	Payload	Box Capacity		
14GX-14	4,400#	9,600#	7.2 Cubic Yards		
14GX-16	4,700#	9,300#	8.3 Cubic Yards		

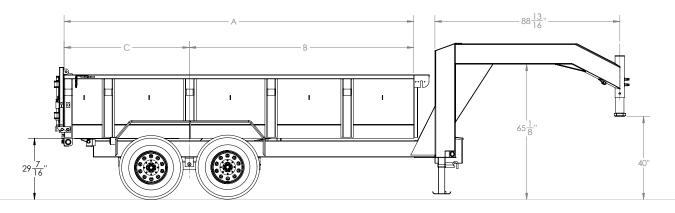

\*Weights and cargo capacities shown are for base models without options and are estimates only

# **146X** Heavy Duty Tandem Axle Extra Wide Gooseneck Dump •



Model	Weight*	Description
14GX-14	4,400#	83" x 14' Heavy Duty Tandem Axle Gooseneck Dump
14GX-16	4,700#	83" x 16' Heavy Duty Tandem Axle Gooseneck Dump

\*Weights shown are for base models without options and are estimates only

### **Optional Equipment**

Category	Description
COUPLERS	30,000# Square Adjustable Screw Type Coupler
JACKS	Dual 2-Speed Landing Gear
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-E)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G)
RAMPS	7' Slide In Ramps
POWER	Wireless Remote
POWER	5 Watt Solar Charger
BODY	24" Expanded Metal Side Extensions (14')
BODY	24" Expanded Metal Side Extensions (16')
BODY	3' Solid Sheet Metal Sides (14')
BODY	3' Solid Sheet Metal Sides (16')
BODY	4' Solid Sheet Metal Sides (14')
BODY	4' Solid Sheet Metal Sides (16')
BODY	Removable Deck on the Neck- Bolt On (8' W x 6' L)