



**39A**

Available options: 129, 856

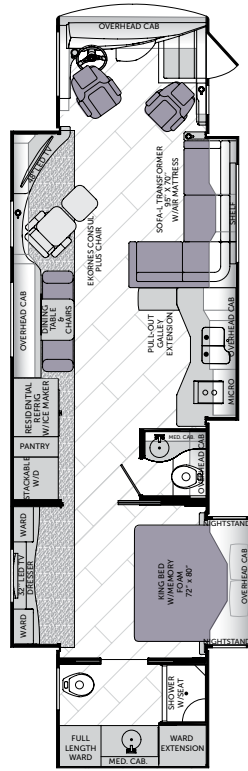

**42G**

Available options: 087, 129

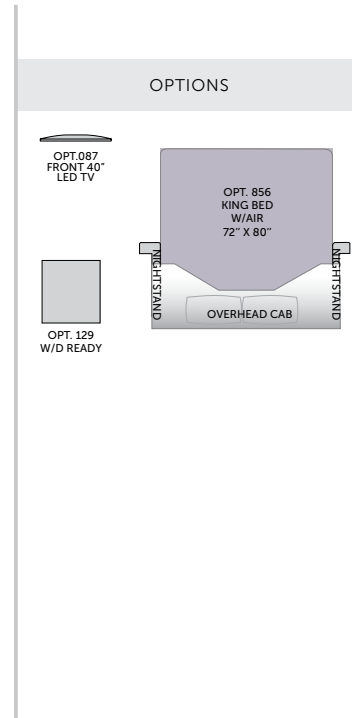

**WEIGHTS**































CHASSIS – LIBERTY <sup>®</sup>		
Model	39A	42G
GVWR (lbs) <sup>1</sup>	38,600	47,000
Front GAWR (lbs) <sup>2</sup>	14,600	17,000
Rear GAWR (lbs) <sup>2</sup>	24,000	20,000
Tag Axle GAWR (lbs) <sup>2</sup>	N/A	10,000
GCWR (lbs) <sup>3</sup>	48,600	62,000
Hitch Rating Weight (lbs) <sup>1†</sup>	10,000	15,000
Tongue Weight (lbs) <sup>1</sup>	1,000	1,500
Fuel Capacity (gal)	100	150

**DIMENSIONS & CAPACITIES**

MODEL	39A	42G
Wheelbase (inches)	266"	302"
Overall Length <sup>4</sup>	39'-11.5"	42'-11.5"
Overall Height (with A/C)	12'-11"	12'-11"
Overall Width (maximum) <sup>5, 6</sup>	102"	102"
Interior Height (maximum)	84"	84"
Interior Width (maximum)	96"	96"
Fresh Water Holding Tank (gal)	100	100
Grey Water Holding Tank (gal)	60	60
Black Water Holding Tank (gal)	40	40

**CHASSIS – Liberty 450**

- MODEL: Freightliner<sup>®</sup> XCM Series
- ENGINE: Cummins<sup>®</sup> ISL9 w/2-Stage Engine Brake
- TORQUE: 1,250 lb-ft @ 1,400 RPM
- HORSEPOWER: 450 HP
- TRANSMISSION: Allison<sup>®</sup> 3000 MH, 6-Speed w/Electronic Shifter
- ALTERNATOR: 170-Amp Leece-Neville
- FRONT TIRES: 295/80R 22.5 Michelin<sup>®</sup> Radial (2) - 39A
- FRONT TIRES: 315/80R 22.5 Michelin<sup>®</sup> Radial (2) - 42G
- REAR TIRES: 295/80R 22.5 Michelin Radial

ISLAND SPICE	CONTEMPORARY		ISLAND SPICE				
	TRADITIONAL						
MOUNTAIN MIST	CONTEMPORARY		MOUNTAIN MIST				
	TRADITIONAL						
RIVERSTONE	CONTEMPORARY		RIVERSTONE				
	TRADITIONAL						



All wood stains are also available in a Satin Finish.

Printed fabric samples are representations of actual fabrics and may be limited due to standard printing technology.

**IMPORTANT — PLEASE READ:** Product information, photography and illustrations included in this publication were as accurate as possible at the time of printing. For further product information and changes, please visit our website at [www.AmericanCoach.com](http://www.AmericanCoach.com) or contact your local American Coach dealer. Prices, materials, design and specifications are subject to change without notice. All weights, fuel, liquid capacities and dimensions are approximate. American Coach has designed its recreational vehicles to provide a variety of uses for its customers. Each vehicle features optimal seating, sleeping, storage and fluid capacities. The user is responsible for selecting the proper combination of loads (i.e., occupants, equipment, fluids, cargo, etc.) to ensure that the vehicle's capacities are not exceeded.

- 1. GVWR (Gross Vehicle Weight Rating) is the maximum permissible weight of this fully loaded motor home. The GVWR is equal to or greater than the sum of the (UVW) unloaded vehicle weight plus the (OCCC) occupant cargo-carrying capacity.\*
  - 2. GAWR (Gross Axle Weight Rating) is the maximum permissible loaded weight a specific axle is designed to carry.
  - 3. GCWR (Gross Combined Weight Rating) is the value specified by the motor home manufacturer as the maximum allowable loaded weight of this motor home with its towed vehicle. Towing and braking capacities may be different. Refer to American Coach and chassis manufacturer's manuals for complete information.
  - 4. Length measured from front bumper to rear bumper (excludes accessories).
  - 5. Excludes safety equipment and awnings.
  - 6. Motor homes feature a body width over 96" which will restrict your access to certain roads. Before purchasing, you should research any state and/or province road laws which may affect your usage.
- N/A = Not Applicable
- † The chassis manufacturer recommends the installation of a supplemental brake control system to activate the brakes on the vehicle or trailer you are towing. Hitch receiver ratings expressed are maximum for the hitch receiver installed and may require the purchase of additional equipment that is dependant on the weight of the towed load. Consult with hitch receiver manufacturer for further information.
  - †† The Minimum Towable Load of this vehicle is the available weight capacity, up to GCWR, when the coach is fully loaded to maximum GVWR. However, if the coach is loaded to something less than maximum GVWR, that extra available weight capacity can be added to your Towable Load. For example, if your coach is loaded to 1,000 lbs less than maximum GVWR, your Towable Load increases accordingly. Do not exceed the hitch rating weight, GVWR or GCWR.
  - \* UVW and OCCC are found on the label containing the federal certification tag in each RV.
  - \*\* All 2016 American Coach motor homes include a 1-year American Coach Premier Roadside Assistance membership. For complete info, see your American Coach dealer.
- CONTACT US:** To locate a dealer near you, visit our website at [www.AmericanCoach.com](http://www.AmericanCoach.com) or call 1-800-322-8216. We can also be contacted at American Coach Customer Care, P.O. Box 31, Decatur, IN 46733.