



Easy driving,
easy living.

Making optimal use of the fuel-efficient Ram ProMaster® chassis, the Winnebago® Travato® provides all the comforts of home in an easy-driving coach. Newly upgraded features include 215-watt solar panels, premium insulation for extended-season camping, SuperSprings® SumoSprings® suspension for a smoother, more comfortable ride, RAM® Tough-Track™ mounts, and the quieter, Bluetooth-controlled Coleman®

Mach 10 air conditioner with directional vents. The optional Pure³ Energy Management System in the 59GL and 59KL provides 9,600 usable watt-hours of power without a generator or electrical hookup, and now includes a 110-volt heating pad for the energy pack in cold temperatures. Factor in Winnebago's legendary build quality and the result is the class-leading, adventure-ready Winnebago Travato.


TRAVATO

WINNEBAGO
BOUND BY THE W™


TRAVATO

Vinyl

Ultraleather

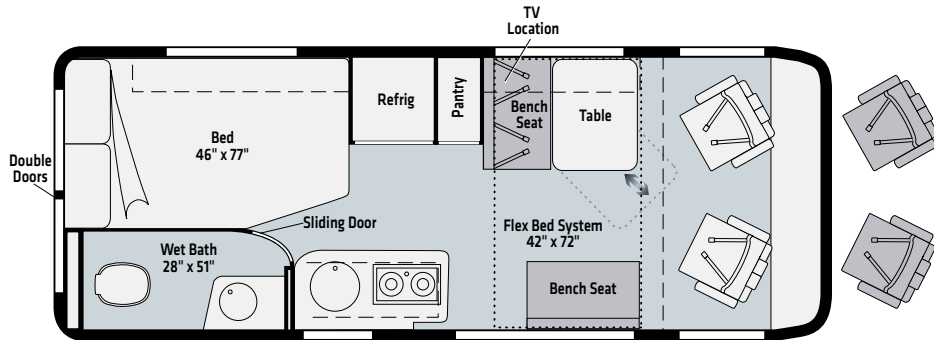

59G/GL

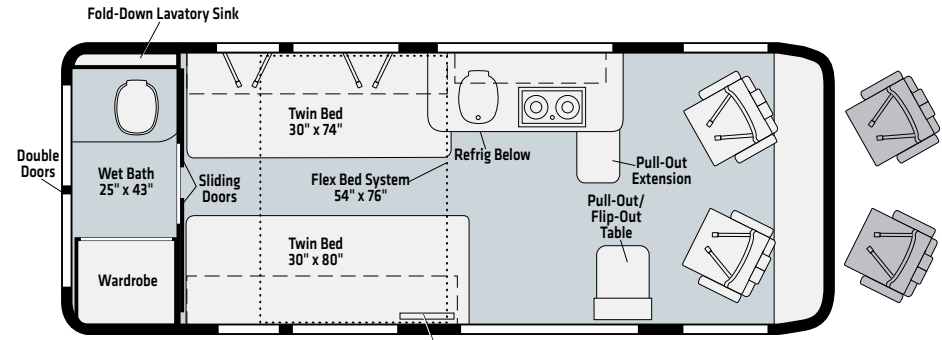

59K/KL

Weights | Measures

	59G	59GL	59K	59KL
Length	21'	21'	21'	21'
Exterior Height ¹	9'4"	9'4"	9'4"	9'4"
Exterior Width	6'9"	6'9"	6'9"	6'9"
Awning Length	13'	13'	13'	13'
Interior Height	6'3"	6'3"	6'3"	6'3"
Interior Width	6'2"	6'2"	6'2"	6'2"
Freshwater Tank Capacity ² (gal.)	21	18	25	18
Water Heater Capacity (gal.)	2.6*	2.6*	2.6*	2.6*
Holding Tank Capacity - Black/Gray ² (gal.)	11/15	11/15	13/13	12/13
LP Capacity ³ (lbs.)	25.38	25.38	25.38	25.38
Fuel Capacity (gal.)	24	24	24	24
GCWR ³ (lbs.)	11,500	11,500	11,500	11,500
GVWR (lbs.)	9,350	9,350	9,350	9,350
GAWR - Front (lbs.)	4,620	4,620	4,620	4,620
GAWR - Rear (lbs.)	5,291	5,291	5,291	5,291
Wheelbase	159"	159"	159"	159"

* Quick Recovery Truma Combi™ water/coach heater system runs on LP and/or 110-volt electric (includes 2-850-watt heating elements)

1. The height of each model is measured to the top of the tallest standard feature and is based on the curb weight of a typically equipped unit. The actual height of your vehicle may vary by several inches depending on chassis or equipment variations. Please contact your dealer for further information.
2. Capacities are based on measurements prior to tank installation. Slight capacity variations can result due to installation applications.
3. Capacities shown are tank manufacturer's listed water capacity (W.C.) Actual filled LP capacity is 80% of listing due to overfilling prevention device on tank.
4. Actual towing capacity is dependent upon your particular loading and towing circumstances, which includes the GVWR, GAWR and GCWR as well as adequate trailer brakes. Please refer to the Operator's Manual of your vehicle for further towing information.

NA Not Available

Not all items available in combination. See dealer for details.

Because features, specifications, equipment, and options may vary from those highlighted in this brochure, the buyer is responsible for confirming with the dealer the features, specifications, equipment, and options included on their specific vehicle. In addition, Winnebago's program of continuous product improvement may result in changes to vehicle specifications, equipment, model availability, and price without notice.