









# Safety and Adventure

... with  $AZDEL^{\otimes}$  COMPOSITE PANELS "ONBOARD". PROVEN TECHNOLOGY USED IN RVS SINCE 2006.

## AZDEL® Composite Panels

AZDEL Composite Panels have been used in RV Exterior and Interior sidewall, ceilings, and roofs since 2006.

AZDEL Composite Panels are constructed using a blend of polypropylene and fiberglass creating a strong, lightweight, quiet, water resistant, temperature resistant, odorless and environmentally friendly wall that will increase the life of your RV.

## AZDEL® Exterior Construction

rpod



## Knock on Wood: Traditional Wood Sidewall

- Absorbs and retains water
- Affected by humidity and temperature changes
- Susceptible to mold, rot, warpage and delamination
- Imported
- Reflects noise
- Heavier

## **Soak Test**

- 60 Day Water Soak Test
- Wood has visible mold and decay requiring wall to be repaired
- AZDEL was 100% unaffected



## AZDEL® Key Benefits



Odorless, Formaldehyde Free



No Rot, Mold, Warpage, or Delamination









Unaffected by Humidity and Temperature Changes



2X Insulation Value



50% Lighter







60 GAL. GREY WATER (RP202 ONLY)

# LARGEST Holding Tanks In Class

# FILL & EMPTY YOUR TANKS LESS.

30 gal. Fresh water 30 GAL. GREY WATER 30 gal. Black water



R-Pod is packed with many great features that are normally found in larger units. If you enjoy cooking, this is the unit for you! Our new concrete-look seamless countertops, the largest refrigerator in its class, and a 2-burner stove paired with a convection oven makes cooking on the road enjoyable. R-Pod also has a brand new interior look, including newly designed vinyl furniture with a honeycomb accent, flush flooring, and Tupelo Honey decor with white cabinetry.








## **CLASSIC 6 1/2' WIDE MODELS**

**ONE PIECE FIBERGLASS ROOF** 

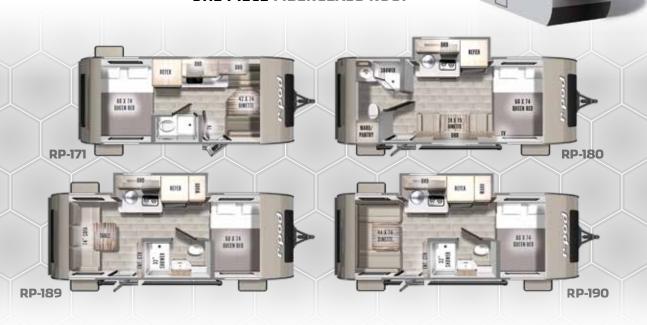

## 7 1/2' WIDE MODELS

**TUFFLEX PVC ROOF WITH 20-YEAR WARRANTY** 









#### **SPECIFICATIONS**

MODEL	RP-171	RP-180	RP-189	RP-190	RP-192	RP-193	RP-195	RP-196	RP-201	RP-202
Unloaded Vehicle Weight	2714	2950	3075	2979	3449	3654	3587	3600	4360	4576
Hitch Weight	340	332	354	307	460	435	362	361	500	485
Cargo Carrying Capacity	1126	882	779	828	1411	1181	1175	1161	2121	1911
Exterior Length w/o Spare Tire	19′ 0″	20' 0"	20′ 4″	20′ 4″	22′ 2″	22′ 11″	22′ 2″	22′ 2″	25′ 0″	25′ 0″
Exterior Pod Width	6′ 5″	6′ 5″	6′ 5″	6′ 5″	7′ 4″	7′ 4″	7′ 4″	7′ 4″	7′ 4″	7′ 4″
Exterior Overall Width	8′ 0″	8′ 0″	8′0″	8′0″	8′0″	8′ 0″	8′ 0″	8′ 8″	8′0″	8′0″
Exterior Height*	8′ 8″	8′ 8″	8′ 8″	8′ 8″	8′ 9″	8′ 9″	8′ 9″	8′ 9″	9′ 4″	9′ 4″
Exterior Height with A/C	9′ 7″	9′ 7″	9′ 7″	9′ 7″	9′ 10″	9′ 10″	9′ 10″	9′ 10″	10′ 7″	10′ 7″
LP Capacity (lbs.)	20	20	20	20	20	20	20	20	20	20
Fresh Water (gal.)	30	30	30	30	30	30	30	30	30	30
Grey Water (gal.)	30	30	30	30	30	30	30	30	30	60
Black Water (gal.)	30	30	30	30	30	30	30	30	30	30

GVWR (Gross Vehicle Weight Rating) - is the maximum permissible weight of the unit when fully loaded. It includes all weights, inclusive of all fluids, cargo, optional equipment and accessories. For safety and product performance do NOT exceed the GVWR.

GAWR (Gross Axle Weight Rating) - is the maximum permissible weight, including cargo, fluids, optional equipment and accessories that can be safely supported by a combination of all axles.

UVW (Unloaded Vehicle Weight)\* - is the typical weight of the unit as manufactured at the factory. It includes all weight at the unit's axle(s) and tongue or pin and LP Gas. The UVW does not include cargo, fresh potable water, additional optional equipment or dealer installed accessories.

\*Estimated Average based on standard build optional equipment.

CCC (Cargo Carrying Capacity)\*\* - is the amount of weight available for fresh potable water, cargo, additional optional equipment and accessories. CCC is equal to GVWR minus UVW. Available CCC should accommodate fresh potable water (8.3 lbs per gallon). Before filling the fresh water tank, empty the black and gray tanks to provide for more cargo capacity.

\*\* Estimated average based on standard build optional equipment.



#### PRE-DELIVERY INSPECTION FACILITY

20,000 square feet of quality assurance. The bare essentials for a premium product. This state-of-the-art facility gives immediate daily feedback to production for quality assurance in every unit built.

### **CUSTOMER SATISFACTION**



www.Forest River Buy Local.com



Each Forest River RV is weighed at the manufacturing facility prior to shipping. A label identifying the unloaded vehicle weight of the actual unit and the cargo carrying capacity is applied to every Forest River RV prior to leaving our facilities. The load capacity of your unit is designated by weight, not by volume, so you cannot necessarily use all available space when loading your unit.

All information contained in this brochure is believed to be accurate at the time of publication. However, during the model year, it may be necessary to make revisions and Forest River, Inc., reserves the right to make all such changes without notice, including prices, colors, materials, equipment and specifications as well as the addition of new models and the discontinuance of models shown in this brochure. Therefore, please consult with your Forest River dealer and confirm the existence of any materials, design or specifications that are material to your purchase decision. 10/20

©Copyright 2020 Forest River Inc - All Rights Reserved.



#### 24/7 EMERGENCY ROADSIDE ASSISTANCE WITH VEHICLE PURCHASE

TOWING
JUMP-STARTS
TIRE CHANGES
FLUID DELIVERY
LOCKOUT
SERVICE

WINCH-OUT MOBILE MECHANIC TECHNICAL SUPPORT DEALER LOCATOR SERVICES



\*VALID FOR 1 YEAR FROM DATE OF PURCHASE



#### Forest River Owner "Digital Kit" App

Now you can have your Owner's Manual with you wherever you are. Download our FREE App from the App Store or Google Play and you'll have the information right at your fingertips.





#### Learn More

Scan this barcode using a QR Reader on your smart phone to learn more about Forest River.



## Repod Division

Forest River, Inc. 2780 College Ave. Goshen, IN 46528

#### 574.537.1452

www.forestriverinc.com/rpod www.forestriveraccessories.com