

**OPEN RANGE**



TRAVEL TRAILER

# VOYAGE: UNCHARTED



**Highland**  
RIDGE RV


Own the Outdoors



OT171RD



OT23RLS

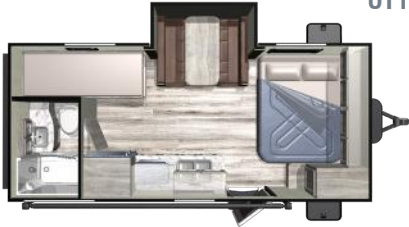

OT180BHS



OT24BHS



OT182RB



OT26BH



OT20FBS



OT26BHS



OT20MB



OT27BHS



OT21FB



OT27RLI



OT21RBS



OT282BH

FEATURES

STANDARDS

OPTIONS

- » Magnum Roof System
- » Fiberglass Roof Insulation
- » Pocket Screwed Lumbercore Cabinet Construction
- » Residential Style Flooring - Designer Carefree Congoleum
- » 5/8" Main Floor Decking
- » Seamless One Piece Roofing
- » Gas DSI Water Heater
- » Black Front Diamond Plating
- » 120V G.F.C.I Protected Exterior Receptacle
- » Bumper with Drain Hose Carrier and End Caps
- » Omni-Directional Digital TV/AM/FM Antenna with Powered Amplifier
- » Electric Brakes
- » Nitrogen Filled Tires
- » Solar Prep
- » Tinted Safety-Glass Windows
- » Wide Entrance Doors with Screen Door and Window
- » Galvanized Steel Wheel Wells
- » (2) 30lb LP Bottles with Auto Changeover and Bottle Cover (Dual Axle Models)
- » (1) 30lb. LP Bottle (Single Axle Models)

- » Electric Awning with LED Lighting and Integrated Speakers
- » Stabilizer Jacks
- » Electric Tongue Jack
- » Spare Tire with Carrier
- » Docking Station with Tank Flush
- » Ez-Store Detachable Power Cord
- » 12V CD/DVD Stereo with USB Input
- » TV Cable and Satellite Prep
- » Double-Over-Double Bunk Bed with 600lb. Capacity
- » 12V Powered Bathroom Vent
- » Shower Surround
- » Stainless Steel Appliances
- » 2 Burner Cooktop and Convection Microwave (Single Axle Models)
- » 3 Burner Cooktop with 17" Oven and Microwave (Dual Axle Models)
- » Heated Enclosed Underbelly
- » Magnet Catches for Baggage Doors
- » Aluminum Rims
- » Rear Access Ladder
- » Flexible LP Lines

- » 15K BTU Air Conditioner
- » 50 amp SVC with 2nd 13.5 A/C (Select Models)

SPECIFICATIONS

	171RD**	180BHS**	182RB**	20FBS	20MB	21FB	21RBS	23RLS	24BHS	26BH	26BHS	27BHS	27RLI	282BH
Square Feet	144	158	152	164	157	172	219	219	228	202	248	262	298	268
Unloaded Vehicle Weight (lbs.)	TBD	TBD	TBD	4,205	TBD	4,285	5,330	5,445	5,765	4,650	5,770	6,275	7,330	6,445
Dry Hitch Weight (lbs.)	TBD	TBD	TBD	420	TBD	545	575	650	780	570	765	750	1,085	595
Gross Vehicle Weight (GVWR)	TBD	TBD	TBD	6,000	TBD	6,000	7,200	6,950	7,650	6,500	7,500	8,500	8,995	8,500
Cargo (Gross)	TBD	TBD	TBD	1,795	TBD	1,715	1,670	1,505	1,885	1,850	1,730	2,225	1,665	2,055
Exterior Length (Pin to Rear)	21' 8"	22'	22' 4"	23' 6"	23' 4"	25' 8"	27' 4"	29' 1"	29'	29' 4"	30' 7"	31' 8"	33' 10"	32' 5"
Exterior Height	TBD	TBD	TBD	126"	TBD	126"	132"	132"	131"	126"	133"	134"	133"	134"
Exterior Width	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"
Exterior Width (Slides Out)	96"	121"	96"	113"	96"	96"	131"	131"	132"	96"	132"	132"	155"	132"
Interior Height (Overall)	81"	81"	81"	81"	81"	81"	81"	81"	81"	81"	81"	81"	81"	81"
Fresh Water Capacity (gals.)*	48	48	48	48	48	48	48	48	48	48	48	48	48	48
Gray Waste Water Capacity (gals.)	32	32	32	32	32	32	64	32	32	32	32	32	40	64
Black Waste Water Capacity (gals.)	32	32	32	32	32	32	32	32	32	32	32	32	32	32
LP Capacity (lbs.)	(1) 30	(1) 30	(1) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30	(2) 30
Standard Tire Size & Range	15" D	15" D	15" D	14" C	14" C	14" D	15" D	14" D	15" D	14" D	15" D	15" D	15" D	15" D
Awning Size	13'	13'	14'	12'	15'	16' 6"	19'	19'	20'	19'	16'	18'	20'	20'

\*\*Single Axle Models

**1 SLIDE OUTS**

- » Exterior slide out walls built with studs 16" on center
- » Residential fiberglass insulation full wall
- » Laminated metal endwalls with residential fiberglass insulation

**2 DOORS & LOCKS**

- » Dark tinted safety glass
- » Full width entrance door with screen and window
- » Baggage and storage doors with magnetic latches

**3 ROOF**

- » Strength tested magnum roof system- 50% than competition with 4,500lb rating
- » 3/8" Residential decking with residential fiberglass insulation
- » Sealed with seamless one piece material that is 30% lighter, heat reflectivity and embossed finish

**4 FLOORS**


- » Wood reinforced framed construction 16" on center perpendicular to frame crossmembers
- » Built in galvanized wheel wells
- » Insulated with residential fiberglass insulation, anti-puncture moisture barrier woven underbelly material wrapped around floor

**5 SIDEWALLS**

- » Exterior walls with studs 16" on center for consistency and strength
- » Residential fiberglass insulation secured in between each stud for maximum efficiency
- » Superior mesa metal—thicker than average metal with S-locking design for maximum rigidity

**6 MAIN BODY**

- » Aluminum wheels with nitrogen filled tires
- » Structural steel I-beam with stamped cross members for added strength
- » Wide stance axles for stability with various size axles based on model
- » Flexible LP gas lines for longevity and durability

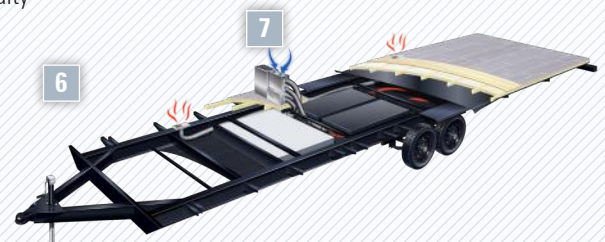

**7 HEATING SYSTEM**

- » High efficiency furnaces provide heat down to the fully enclosed underbelly
- » Holding tanks are warmed by the forced air heat which prevents freeze-ups

Your Open Range Dealer:



For more information visit us at:  
[www.HighlandRidgeRV.com](http://www.HighlandRidgeRV.com)

Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error in the literature. Some items shown are not included as standard or optional equipment.