

SMART-CONFIDENT-PROVEN

















THE TRAILER BOOK

PROFESSIONAL OPEN & ENCLOSED TRAILERS



SMART

We employ the latest CAD/CAM technologies to optimize design, giving you the durability, carrying capacity and features that make Sure-Trac the smart choice.





CONFIDENT

With our industry leading warranty, you can be confident we will stand behind your Sure-Trac trailer for years to come.

- 3-Year Frame and Component Overall Protection
- 1-Year Tire Hazard and Abuse Protection
- 5-Year Standard Tire Warranty
- 5-Year Axle and Suspension Warranty

See details at sure-trac.com





PROVEN

"In my line of work, reliability of my equipment in all kinds of conditions is critical to success. I depend on my Sure-Trac trailers from planting through harvest."

- Kyle, Farmer







LANDSCAPE AND UTILITY TRAILERS

GALVANIZED UTILITY TRAILERS

CAR HAULER TRAILERS

HYDRAULIC DUMP TRAILERS

EQUIPMENT TRAILERS

DECKOVER TRAILERS

OPEN TRAILER OPTIONS

ENCLOSED TRAILERS

ENCLOSED TRAILER OPTIONS



1

9

12

12

43

51

52

LANDSCAPE AND UTILITY TRAILERS







LANDSCAPE TRAILERS - THE SURE-TRAC DIFFERENCE

*Features Based on Tube Top Models

Self-Retained Gate Pins

With no loose components, your pins are always where you need them.






Fold Flat HD Ramp Gate
Heavy duty square tube construction
offers proven durability.



Setback Jack*Conveniently located so you can safely lower your tailgate without hitting the jack.

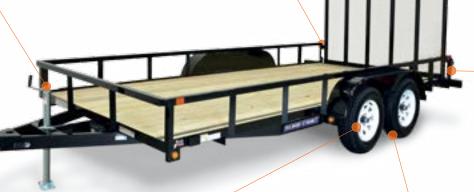



Spring Assist Gate*
Spring assistance allows you to lower and raise the gate with less effort.



Self-Adjusting Brakes

Adjusting during every forward stop provides shorter braking distance and prevents premature brake liner wear.



Radial TiresProvide a smoother, softer ride and longer tire life.





We carefully choose dealers who represent Sure-Trac with integrity and great customer service, but most of all, we work with people we trust.

TUBE TOP ATV







Spring Assist Gate



Zinc Plated Setback Jack



Spare Tire Carrier



New Standard Stake Pockets





Fold Flat HD Ramp Gate Spring Assist Ramp Gate Self-Retained Gate Pins Zinc Plated Setback Jack Sealed LED Lights Protected Wiring

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 2 x 2 Tube Top Rail Tube Uprights Front and Rear Board Retainers Spare Tire Mount Stake Pockets HD Tread Plate Fenders

OPTIONS

Gate Upgrades Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	6' x 12'	7' x 12'	7' x 14' SA	7' x 14' TA	7' x 16'
GVWR (lbs)	2990	2990	2990	7000	7000
GAWR (lbs/axle)	3500	3500	3500	3500	3500
Curb Weight (Ibs)	1320	1370	1450	1740	1910
Payload (lbs)	1670	1620	1540	5260	5090
Coupler		—— 2" Ball ——		2-5/1	6" Ball ———
Electric Plug		— 4-Way Flat —		7-Way	Round —
Overall Length	185"	185"	209"	209"	233"
Bed Length	144"	144"	168"	168"	192"
Bed Width	71.5"	81.5"	81.5"	81.5"	81.5"
Deck Height	18"	18"	18"	18"	18"
Coupler Height	16"	16"	16"	16"	16"

ANGLE IRON UTILITY







DOT Approved Lighting



Fold Flat HD Ramp Gate





SURE-TRAC DIFFERENCE

Fold Flat HD Ramp Gate Self-Retained Gate Pins Zinc Plated Jack

FEATURES

DOT Approved Lights Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

Board Retainers Front and Back HD Tread Plate Fenders

OPTIONS

Gate Options
Spare Tire Mount
Wheel Upgrades
Spare Tire
Color Options
Contact Your Local Dealer
for More Options

SPECIFICATIONS	5' x 8' 3K	5' x 10'	6' x 10'	6' x 12'	7' x 12'	7' x 16'
GVWR (lbs)	2990	2990	2990	2990	2990	7000
GAWR (lbs/axle)	3500	3500	3500	3500	3500	3500
Curb Weight (lbs)	890	960	990	1115	1300	1820
Payload (lbs)	2100	2030	2000	1875	1690	5180
Coupler			— 2" Ball —			2-5/16" Ball —
Electric Plug			4-Way Flat			7-Way Round —
Overall Length	137"	161"	161"	185"	185"	233"
Bed Length	96"	120"	120"	144"	144"	192"
Bed Width	61.5"	61.5"	71.5"	71.5"	71.5"	81.5"
Deck Height	18"	18"	18"	18"	18"	18"
Coupler Height	16"	16"	16"	16"	16"	16"

TUBE TOP UTILITY







Board Retainer



Zinc Plated Setback Jack



Spare Tire Carrier



Spring Assist Gate





SURE-TRAC DIFFERENCE

Fold Flat HD Ramp Gate Spring Assist Ramp Gate Self-Retained Gate Pins Zinc Plated Setback Jack Sealed LED Lights Protected Wiring

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 2 x 2 Tube Top Rail (3 x 2 on 10K) Tube Uprights Front and Rear Board Retainers Spare Tire Mount HD Tread Plate Fenders Stake Pockets

OPTIONS

Gate Upgrades Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	5' x 8' 3K	5' x 10'	6' x 10'	6' x 12'	7' x 12'	7' x 14' SA	7' x 14' TA	7' x 16'	7' x 18'	7' x 20'
								7K/10K	7K/10K	7K/10K
GVWR (lbs)	2990	2990	2990	2990	2990	2990	7000	7000/9900	7000/9900	7000/9900
GAWR (lbs/axle)	3500	3500	3500	3500	3500	3500	3500	3500/5000	3500/5000	3500/5000
Curb Weight (lbs)	890	960	990	1115	1300	1420	1700	1820/2530	2200/2650	2410/2770
Payload (lbs)	2100	2030	2000	1875	1690	1570	5300	5180/7370	4800/7250	4590/7130
Coupler				— 2" Ball —					2-5/16" Ball	
Electric Plug				4-Way Flat					7-Way Round	
Overall Length	137"	161"	161"	185"	185"	209"	209"	233"	257"	281"
Bed Length	96"	120"	120"	144"	144"	168"	168"	192"	216"	240"
Bed Width	61.5"	61.5"	71.5"	71.5"	81.5"	81.5"	81.5"	81.5"	81.5"	81.5"
Deck Height	18"	18"	18"	18"	18"	18"	18"	18"/19.5"	18"/19.5"	18"/19.5"
Coupler Height	16"	16"	16"	16"	16"	16"	16"	16"/17"	16"/17"	16"/17"

TUBE TOP 3-BOARD HIGH SIDE







Zinc Plated Setback Jack



Sealed Rubber Mounted LED Lights



Spare Tire Carrier



New Standard D-Rings







Fold Flat HD Ramp Gate

SURE-TRAC DIFFERENCE

Fold Flat HD Ramp Gate Spring Assist Ramp Gate Self-Retained Gate Pins Zinc Plated Setback Jack Sealed LED Lights Protected Wiring

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking 5/4 Treated Lumber Sides and Front

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 2 x 2 Tube Top Rail Tube Uprights Front and Rear Board Retainers Spare Tire Mount D-Rings HD Tread Plate Fenders

OPTIONS

Gate Upgrades
Wheel Upgrades
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	5' x 8'	5' x 10'	6' x 10'	6' x 12'	7' x 12'	7' x 14'	7' x 16'
GVWR (lbs)	2990	2990	2990	2990	2990	7000	7000
GAWR (Ibs/axle)	3500	3500	3500	3500	3500	3500	3500
Curb Weight (lbs)	990	1170	1230	1300	1430	2040	2210
Payload (lbs)	2000	1820	1760	1690	1560	4960	4790
Coupler			2" A-Frame Coupler —			2-5/16" A-F	rame Coupler——
Electric Plug			4-Way Flat			7-Way	Round —
Overall Length	137"	161"	161"	185"	185"	209"	233"
Bed Length	96"	120"	120"	144"	144"	168"	192"
Bed Width	59.5"	59.5"	69.5"	69.5"	79.5"	79.5"	79.5"
Deck Height	18"	18"	18"	18"	18"	18"	18"
Coupler Height	16"	16"	16"	16"	16"	16"	16"

STEEL HIGH SIDE







Board Retainers



Spring Assist Gate







SURE-TRAC DIFFERENCE

Fold Flat HD Ramp Gate Spring Assist Ramp Gate Self-Retained Gate Pins Zinc Plated Setback Jack Sealed LED Lights Protected Wiring

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

14" Solid Steel Sides 4" Tie Down Rail Front and Rear Board Retainers Spare Tire Mount D-Rings HD Tread Plate Fenders

OPTIONS

Gate Upgrades Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	5' x 8'	5' x 10'	6' x 10'	6' x 12'	7' x 12'	7' x 16'
GVWR (lbs)	2990	2990	2990	2990	2990	7000
GAWR (lbs/axle)	3500	3500	3500	3500	3500	3500
Curb Weight (lbs)	980	1060	1110	1230	1380	1950
Payload (lbs)	2010	1930	1880	1760	1610	5050
Coupler			2" Ball			2-5/16" Ball
Electric Plug			— 4-Way Plug —			7-Way Round
Overall Length	137"	161"	161"	185"	185"	233"
Bed Length	96"	120"	120"	144"	144"	192"
Bed Width	61.5"	61.5"	71.5"	71.5"	81.5"	81.5"
Deck Height	18"	18"	18"	18"	18"	18"
Coupler Height	16"	16"	16"	16"	16"	16"







GALVANIZED HOMEOWNER TILT BED









Spare Tire Carrier Removable Steel High Side Kit



Protected DOT Lighting

Optional

Galvanized for long-term protection against rust and corrosion in harsh environments





Designed with High Tensile Steel to provide the ultimate strength-to-weight ratio

SURE-TRAC DIFFERENCE

Galvanized High Tensile Steel Frame Polymer Dent Resistant Fenders Zinc Plated 2" Coupler Zinc Plated Jack Protected Wiring

FEATURES

DOT Approved Lighting 5/4 Pressure Treated Deck

2K Slipper Spring Axle Easy Lube Hubs 13" Radial Tires

(4) Stake Pockets Front Tire Stops

OPTIONS

Galvanized Steel Side Kit with Spare Tire Carrier Wheel Options Contact Your Local Dealer for More Options

Patent No. 8,985,664, 9,254,777 & 9,403,567

SPECIFICATIONS	5' x 8'
GVWR (Ibs)	2000
GAWR (lbs/axle)	2000
Curb Weight (lbs)	350
Payload (lbs)	1650
Coupler	2" Ball
Suspension	Slipper Spring
Electric Plug	4-Way Flat
Overall Length	137"
Bed Length	97"
Bed Width	60.5"
Deck Height	19.5"
Coupler Height	14"

GALVANIZED HIGH SIDE UTILITY



Self-Retained Gate Pins



2000 lb Tie-Downs



Board Retainers









Designed with High Tensile Steel to provide the ultimate strength-to-weight ratio

SURE-TRAC DIFFERENCE

Fold Flat HD Ramp Gate Spring Assist Ramp Gate Self-Retained Gate Pins Zinc Plated Setback Jack Sealed LED Lights Protected Wiring

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 100% Galvanized Frame and Side Panels Zinc Plated Coupler Board Retainers Front and Back Tie Downs Inside Bed (4 SA, 6 TA) Spare Tire Carrier

OPTIONS

Spare Tire Wheel Options Contact Your Local Dealer for More Options

Patent No. 8,985,664, 9,254,777 & 9,403,567


SPECIFICATIONS	5' x 8'	5' x 10'	6' x 10'	6' x 12'	7' x 12'	7' x 16' TA
GVWR (lbs)	2990	2990	2990	2990	2990	7000
GAWR (Ibs/axle)	3500	3500	3500	3500	3500	3500
Curb Weight (lbs)	730	840	940	1060	1090	1630
Payload (lbs)	2260	2150	2050	1930	1900	5370
Coupler			2" Ball			2-5/16" Ball
Electric Plug			4-Way Flat			7-Way Round
Overall Length	141"	165"	165"	189"	189"	240"
Bed Length	98"	122"	122"	146"	146"	194"
Bed Width	59.75"	59.75"	71.75"	71.75"	81.75"	81.75"
Deck Height	18"	18"	18"	18"	18"	18"
Side Rail Height	12"	12"	12"	12"	12"	12"
Coupler Height	16"	16"	16"	16"	16"	16"







CAR HAULER TRAILERS



Easy Access Ramp Storage



Diamond Tread Beavertail



D-Rings



Sealed Rubber Mounted LED Lights



Fender Step



New Standard Zinc Plated



New Standard 7K Dropleg Jack on 10K Models

SURE-TRAC DIFFERENCE

HD Tread Plate Fenders
Sealed LED Lighting
EverLink™ - High Performance
Wiring Harness
Sealed Brake Connections

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes Setback Jack 2' Tread Plate Beavertail Front and Rear Board Retainers Spare Tire Mount Stake Pockets (4) D-Rings Slide-In 5' Fabricated Ramps

OPTIONS

Coupler Upgrades
Jack Upgrades
Wheel Upgrades
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	7' x 16'	7' x 18'	7' x 20'	7' x 18'	7' x 20'
GVWR (lbs)	7000	7000	7000	9900	9900
GAWR (Ibs/axle)	3500	3500	3500	5000	5000
Curb Weight (lbs)	1940	2080	2200	2380	2550
Payload (lbs)	5060	4920	4800	7520	7350
Coupler			- 2-5/16" Ball -		
Electric Plug			– 7-Way Round –		
Overall Length	248"	312"	336"	312"	336"
Deck Length - Flat	168"	192"	216"	192"	216"
Between Fenders	82"	82"	82"	82"	82"
Deck Height	21"	21"	21"	23"	23"
Coupler Height	17"	17"	17"	18"	18"

STEEL DECK CAR HAULER









SURE-FLOW Sure-Flow™ Aerodynamic Bulkhead

Fender Step

D-Rings

Ramp Storage

New Standard Zinc Plated Setback Jack - 7K Model





Spare Tire Carrier

Removable Fender (Driver's Side)



SURE-TRAC DIFFERENCE

Sure-Flow[™] Aerodynamic Bulkhead Heavy Duty Steel Bulkhead HD Tread Plate Fenders Sealed LED Lighting EverLink[™] - High Performance Wiring Harness Sealed Brake Connections

FEATURES

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

Setback Jack Tube Main Frame Tubular Full Wrapped Tongue 4' Beavertail Removable Fender (Driver's Side) Stake Pockets and Rub Rail (4) D-Rings Spare Tire Mount Slide-In 5' Fabricated Ramps

OPTIONS

Coupler Upgrades Jack Upgrades Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	7' x 18'	7' x 20'	7' x 18'	7' x 20'
GVWR (lbs)	7000	7000	9900	9900
GAWR (lbs/axle)	3500	3500	5000	5000
Curb Weight (lbs)	1940	2085	2240	2320
Payload (lbs)	5060	4915	7660	7580
Coupler		2-5/16" Ball —		
Electric Plug		7-Way	Round —	
Overall Length	264"	288"	264"	288"
Bed Length Flat	168"	192"	168"	192"
Beavertail Drop Length	48"	48"	48"	48"
Between Fenders	82"	82"	82"	82"
Deck Height	21.5"	21.5"	23"	23"
Coupler Height	17"	17"	18"	18"







D-Rings



Self-Retained Safety Tilt Pins



Removable Fender (Driver's Side)



Available in Electric Hydraulic Power Up/Power Down Version



Sure-Flow™ Aerodynamic Bulkhead

SURE-TRAC DIFFERENCE

Sure-Flow^M Aerodynamic Bulkhead Heavy Duty Steel Bulkhead HD Tread Plate Fenders Sealed LED Lighting Sealed Brake Connections

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 7K Dropleg Jack
Tube Main Frame
Tubular Full Wrapped Tongue
Removable Fender (Driver's Side)
Stake Pockets and Rub Rail
(4) D-Rings
Spare Tire Mount

OPTIONS

Coupler Upgrades Electric Hydraulic Tilt Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	7' x 18'	7' x 20'	7' x 18'	7' x 20'
GVWR (lbs)	7000	7000	9900	9900
GAWR (lbs/axle)	3500	3500	5000	5000
Curb Weight (lbs)	2110	2190	2180	2255
Payload (lbs)	4890	4810	7720	7645
Coupler		2-5/1	6" Ball ———	
Electric Plug		7-Way	Round —	
Overall Length	276"	300"	276"	300"
Bed Length Flat	216"	240"	216"	240"
Between Fenders	82"	82"	82"	82"
Deck Height	22.5"	22.5"	23"	23"







HYDRAULIC DUMP TRAILERS





Every day we work hard to make our products better and your life easier.

Sure-Trac products reflect the pride we take in smart design, great fit and finish, and proven performance.



HYDRAULIC DUMP TRAILERS - THE SURE-TRAC DIFFERENCE

*Features Based on Heavy Duty Low Profile Models



Under Body Secure Tool Storage*Conveniently and securely store your tools.



Smart Integrated Side PanelsA smooth and sleek appeal that provides more structural support.




110 Volt Battery Charger*Easy access to charge your battery.



Multi-Function Gate*Evenly distribute your load with the spreader option or open the barn doors for easy access.



Slipper Spring Suspension
Heavy duty suspension provides more
durability and stability to the trailer than
dual eye springs.



Sealed Brake Connections
Sealed connection withstands exposure
to extreme environments.

UTILITY DUMP





Tarp Tie-Downs

D-Rings



SURE-TRAC DIFFERENCE

Low Profile Deckover with 10" Wheels Removable Front and Rear Panels that Serve as Ramps Swivel Jack with Caster Wheel All LED Lights

FEATURES

Deep Cycle Battery Remote Holster Power Up, Power Down Hydraulics (Single Ram)

Easy Lube Hubs 10" Bias Tires Detachable Tongue Welded Tubular Steel Main Frame (4) D-Ring Tie-Downs 12" Tall Sides

OPTIONS

Chargers Tarp Kit Spare Tire Mount Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS 4.5' x 8'

Style	Deckover
GAWR (Ibs)	2990
GAWR (Ibs/axle)	3500
Curb Weight (lbs)	940
Coupler	2" Ball
Electric Plug	4-Way
Overall Length	142.5"
Bed Length Inside	100"
Bed Width Inside	54"
Bed Height Inside	12"
Deck Height	24"
Coupler Height	17"

LOW PROFILE HOMEOWNER DUMP







Sealed Brake Connections



Stake Pockets



Tarp Mount





SURE-TRAC DIFFERENCE

Integrated Side Body Stiffening System
Integrated Tarp Mount
All LED Lights
EverLinkTM - High Performance Wiring Harness
Sealed Brake Connections

FEATURES

Power Up, Power Down Hydraulics (Single Ram) Deep Cycle Marine Grade Battery

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes Zinc Plated Jack
Spreader/Pickup Style Gate
Tongue Mounted HD Control Box with Key Lock
HD Tread Plate Fenders
Stake Pockets
(5) D-Ring Tie-Downs
Spare Tire Mount

OPTIONS

Gate Options
Battery Chargers
Tarp Kit
Wheel Options
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	5' x 8'	5' x 10'		
GVWR (lbs)	5000	7000		
GAWR (lbs/axle)	5000	3500		
Curb Weight (lbs)	1520	1860		
Payload (lbs)	3480	5140		
Coupler	2" A-Frame Ball	2-5/16" A-Frame Ball		
Electric Plug	7-Way Round			
Overall Length	144"	165"		
Bed Length Inside	96"	120"		
Bed Width Inside	62"	62"		
Bed Height Inside	16"	16"		
Deck Height	25"	26"		
Coupler Height	15.5"	15.5"		

SD LOW PROFILE DUMP




New Standard Multi-Function Gate - 10K Model



LED Lights



Sealed Brake Connections



Stake Pockets





New Standard 7K Dropleg Jack, Ramps and Combo Gate on 10K Models

SURE-TRAC DIFFERENCE

Integrated Side Body Stiffening System
Integrated Tarp Mount
All LED Lights
EverLink™ - High Performance Wiring Harness
Sealed Brake Connections

FEATURES

Power Up, Power Down Hydraulics (Single Ram)
Power Up, Gravity Down Hydraulics (Scissor
and Telescopic)

Deep Cycle Marine Grade Battery

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 7K Dropleg Jack (10K Model)

Combo Barn Door Spreader Gate with Cambar (10K Model)
Tongue Mounted HD Control Box with Key Lock

HD Tread Plate Fenders

(5) D-Ring Tie-Downs

Spare Tire Mount

Ramps (10K Model)

Stake Pockets

Side Steps

OPTIONS

Gate Options Battery Chargers

Tarp Kit

Wheel Options

Color Options

Contact Your Local Dealer for More Options

SPECIFICATIONS	6' x 10'	6' x 10'	6' x 12'
GVWR (lbs)	7000	9900	9900
GAWR (lbs/axle)	3500	5000	5000
Curb Weight (lbs) - Single Ram	2785	2950	3100
Curb Weight (lbs) - Scissor	N/A	3015	3175
Curb Weight (lbs) - Telescopic	N/A	3015	3175
Payload (lbs) - Single Ram	4215	6950	6800
Payload (lbs) - Scissor	N/A	6885	6725
Payload (lbs) - Telescopic	N/A	6885	6725
Coupler		2-5/16" A-Frame	
Electric Plug		— 7-Way Round —	
Overall Length	174"	174"	201"
Bed Width Inside	72"	72"	72"
Bed Length Inside	120"	120"	144"
Bed Height Inside	20"	20"	20"
Coupler Height	18"	18"	18"



SD DECKOVER DUMP



Stake Pockets





SURE-TRAC DIFFERENCE

Integrated Side Body Stiffening System Integrated Tarp Mount All LED Lights EverLink™ - High Performance Wiring Harness Sealed Brake Connections

FEATURES

Power Up, Power Down Hydraulics (Single Ram) Deep Cycle Marine Grade Battery

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

Zinc Plated Jack Spreader/Pick-Up Style Gate Tongue Mounted HD Control Box with Key Lock Stake Pockets (5) D-Ring Tie-Downs Spare Tire Mount

OPTIONS

Gate Options Battery Chargers Tarp Kit Wheel Options Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	6' x 10'	6' x 10'	
GVWR (lbs)	7000	9900	
GAWR (lbs/axle)	3500	5000	
Curb Weight (lbs)	1820	1940	
Payload (lbs)	5180	7960	
Coupler	— 2-5/16" A-Frame Ball Coupler -		
Electric Plug	7-Way	Round —	
Overall Length	159"	159"	
Bed Length Inside	120"	120"	
Bed Width Inside	71.5"	71.5"	
Bed Height Inside	16"	16"	
Deck Height	33"	33"	
Coupler Height	21"	21"	

HD LOW PROFILE DUMP



Spare Tire Mount



Weather Resistant Pump/Battery Box



Sealed Brake Connections



Under Body Tool Secure Storage



Easy Access Ramp Storage



Multi-Function Gate



Slipper Spring Suspension



New Standard 110 Volt Battery Charger



Integrated Side Body Stiffening System
Integrated Tarp Mount
Underbody Secure Tool Storage
Combo Barn Door Spreader Gate with Cambar
All LED Lights
Slipper Springs
Sealed Brake Connections

FEATURES

EverLink™ - High Performance Wiring Harness Power Up, Power Down Hydraulics (Single Ram) Power Up, Gravity Down Hydraulics (Scissor and Telescopic) Deep Cycle Marine Grade Battery 110 Volt Battery Charger

Easy Lube Hubs 16" Radial Tires Self-Adjust Brakes 7K Setback Jack
2-5/16" Adjustable Coupler
Tongue Mounted HD Control Box with Key Lock
10 Gauge Floor
HD Tread Plate Fenders
Side Steps
(5) D-Ring Tie-Downs
Spare Tire Mount
Ramps (Stored Underneath Bed)
Stake Pockets

OPTIONS

Tarp Kit Wheel Options Color Options Contact Your Local Dealer for More Options





New Standard Adjustable Coupler/Setback Jack





Scissor Hoist





Less Stress on Frame Due to Front-lifting Action



Check out our YouTube channel for a hoist comparison



SPECIFICATIONS	82" x 12'	82" x 14'	82" x 16'
GVWR (lbs)	12000	14000	14000
GAWR (lbs/axle)	6000	7000	7000
Curb Weight (lbs) - Dual Ram	3240	3600	3960
Curb Weight (lbs) - Scissor	3400	3800	4160
Curb Weight (lbs) - Telescopic	3240	3600	N/A
Payload (lbs) - Dual Ram	8760	10400	10040
Payload (lbs) - Scissor	8600	10200	9840
Payload (lbs) - Telescopic	8760	10400	N/A
Suspension		 Slipper Spring - 	
Coupler		Adjustable 2-5/16"	
Electric Plug		7-Way Round —	
Overall Length	198"	222"	246"
Bed Length Inside	144"	168"	192"
Bed Width Inside	82"	82"	82"
Bed Height Inside	24"	24"	24"
Deck Height	29"	29"	29"
Coupler Height	Adjustable 19-27"		
Hydraulic Hoist - Dual Ram	———— Dual Ram, Power Up, Power Down ———		
Hydraulic Hoist - Scissor	Po	wer Up, Gravity Do	wn —
Hydraulic Hoist - Telescopic	Po	wer Up, Gravity Do	wn —



Self-Retained Side Panel Latch



Easy Fold-Down Side Panels



Cambar Rear Door Latch



Slipper Spring Suspension



All LED Lights



Easy Access Ramp Storage



Sealed Brake Connections



Adjustable Coupler/Setback Jack





Integrated Side Body Stiffening System Integrated Tarp Mount Underbody Spare Tire Tub Combo Barn Door Spreader Gate with Cambar All LED Lights Slipper Springs Sealed Brake Connections

FEATURES

EverLink™ - High Performance Wiring Harness Power Up, Gravity Down Hydraulics (Scissor) Deep Cycle Marine Grade Battery 110 Volt Battery Charger

Easy Lube Hubs 16" Radial Tires Self-Adjust Brakes

7K Dropleg Jack Tongue Mounted HD Control Box with Key Lock 10 Gauge Floor 20" Fold-Down Sides (5) D-Ring Tie-Downs Ramps (Stored Underneath Bed)

OPTIONS

Battery Chargers Tarp Kit Wheel Options Color Options Contact Your Local Dealer for More Options



New Standard 110 Volt Battery Charger

PECI	FICAT	2NOI	

١	CIII	 4	A1	

GVWR (Ibs)	14000
GAWR (lbs/axle)	7000
Curb Weight (lbs)	4140
Payload (lbs)	9860
Coupler	Adjustable 2-5/16" Ball
Electric Plug	7-Way Round
Overall Length	222"
Bed Length Inside	168"
Bed Width Inside	96"
Bed Height Inside	20"
Deck Height	34"
Coupler Height	Adjustable 19" - 27"
Hydraulic Hoist	Scissor Hoist - Power Up, Gravity Down

Shown with Optional 4' Sides







New Standard 110 Volt Battery Charger

SURE-TRAC DIFFERENCE

I-Beam Gooseneck Coupler Dual 12K Heavy Duty Jacks AII LED Lights Slipper Springs Sealed Brake Connections

FEATURES

EverLinkTM - High Performance Wiring Harness Power Up, Power Down Hydraulics Deep Cycle Marine Grade Battery 110 Volt Battery Charger

Easy Lube Hubs 16" Radial Tires (Dual) Self-Adjust Brakes HD Control Box with Key Lock Rear Barn Doors with Cambar Body Stiffeners 36" Tall Sides Rub Rail Down Side of Body Panels Spare Tire Mount

OPTIONS

Ramps
Battery Charger
Tarp Kit
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	8.5' x 16'	8.5' x 18'	8.5' x 20'	8.5' x 16'	8.5' x 18'	8.5' x 20'
GVWR (lbs)	20000	20000	20000	24000	24000	24000
GAWR (lbs/axle)	10000	10000	10000	12000	12000	12000
Curb Weight (lbs)	6900	7500	8000	7000	8000	8200
Payload (lbs)	13100	12500	12000	17000	16000	15800
Coupler			Goos	eneck ————		
Electric Plug			7-Way	Round —		
Overall Length	300"	324"	348"	300"	324"	348"
Bed Length Inside	192"	216"	240"	192"	216"	240"
Bed Width Inside	96"	96"	96"	96"	96"	96"
Bed Height Inside	36"	36"	36"	36"	36"	36"
Deck Height	36"	36"	36"	36"	36"	36"
Coupler Height		Adjustable 21" - 29"				
Hydraulic Hoist			Scissor Hoist - Pov	ver Up, Power Dow	/n ———	

EQUIPMENT TRAILERS







Competitor's deck height is 4" higher than Sure-Trac.



Slipper Spring Suspension 14K and Up



Spring Assist Ramps



Sealed Rubber Mounted LED Lights



New Standard Adjustable Coupler/Setback Jack – 14K Model



SURE-TRAC DIFFERENCE

All LED Lights HD Slipper Spring Axle (14K Model) Sealed Brake Connections Spring Assisted Ramps

FEATURES

Pressure Treated 2 x 6 Decking

Easy Lube Hubs 4" Drop Axles 15"/16" Radial Tires Self-Adjust Brakes

7K Setback Jack 2-5/16" Adjustable Coupler (14K Models) (4) 5K D-Ring Tie Downs Spare Tire Mount 5' Stand Up Ramps

OPTIONS

Coupler Jack Ramp Upgrades Wheel Upgrades Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	10000	14000
GVWR (lbs)	9900	14000
GAWR (lbs/axle)	5200	7000
Curb Weight 14' (lbs)	2400	2800
Curb Weight 16' (lbs)	2600	2920
Curb Weight 18' (lbs)	2700	2955
Curb Weight 20' (lbs)	3300	3520
Payload 14' (lbs)	7500	11200
Payload 16' (lbs)	7300	11080
Payload 18' (lbs)	7200	11045
Payload 20' (lbs)	6600	10480
Coupler	2-5/16" A-Frame	Adjustable 2-5/16"
Suspension	Eye to Eye Spring	Slipper Spring
Electric Plug	7-Way	Round —
Overall Length/Flat 14'	20' 5"/14'	20' 5"/14'
Overall Length/Flat 16'	22' 5"/16'	22' 5"/16'
Overall Length/Flat 18'	24' 5"/18'	24' 5"/18'
Overall Length/Flat 20'	26' 5"/20'	26' 5"/20'
Bed Width	79.25"	79.25"
Deck Height	15"	17"
Coupler Height	17"	Adjustable 19-27"



Sealed Rubber Mounted LED Lights



HD D-Rings



Slipper Spring Suspension – 14K and Up



Spring Assist Ramp



HD 12K Dropleg Jack -16K Model



New Standard Adjustable Coupler/Setback Jack — 14K Model



SURE-TRAC DIFFERENCE

All LED Lights
HD Slipper Spring Axle (14K Model)
Sealed Brake Connections
EverLink™ - High Performance Wiring Harness
Spring Assist Ramps

FEATURES

Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15"/16" Radial Tires Self-Adjust Brakes

7K Setback Jack 2-5/16" Adjustable Coupler (14K Models) C-Channel Full Wrap Tongue HD Reinforced Tread Plate Fenders Rear Board Retainers Stake Pockets and Rub Rail (4) 5K D-Ring Tie Downs Spare Tire Mount 2' Beavertail 5' Stand Up Ramps

OPTIONS

Coupler
Jack
Ramp Upgrades
Wheel Upgrades
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	10000	14000	16000
GVWR (Ibs)	9900	14000	16000
GAWR (lbs/axle)	5200	7000	8000
Curb Weight 16' (lbs)	2550	2800	3340
Curb Weight 18' (lbs)	2750	2870	3520
Curb Weight 20' (lbs)	2950	3195	3700
Payload 16' (lbs)	7350	11200	12660
Payload 18' (lbs)	7150	11130	12300
Payload 20' (lbs)	6950	10805	12300
Coupler	2-5/16" A-Frame	Adjustable 2-5/16"	Adjustable 4 Bolt Pintle
Suspension	Eye to Eye Spring	Slipper Spring	Slipper Spring
Overall Length/Flat 16'	21' 9"/14'	21' 9"/14'	21' 9"/14'
Overall Length/Flat 18'	23' 9"/16'	23' 9"/16'	23' 9"/16'
Overall Length/Flat 20'	25' 9"/18'	25' 9"/18'	25' 9"/18'
Bed Width	81"	81"	80"
Deck Height	24"	24"	26"
Coupler Height	18"	Adjustable 19-27"	

10K Model Shown







HD D-Rings Slipper Spring Suspension

Adjustable Coupler/Setback Jack





SURE-TRAC DIFFERENCE

All LED Lights
HD Slipper Spring Axle
Sealed Brake Connections
EverLinkTM - High Performance Wiring Harness
Spring Assist Ramps

FEATURES

Pressure Treated 2 x 6 Decking

Easy Lube Hubs 16" Radial Tires Self-Adjust Brakes

7K Setback Jack 2-5/16" Adjustable Coupler C-Channel Full Wrap Tongue HD Reinforced Tread Plate Fenders Rear Board Retainers Stake Pockets and Rub Rail (4) 5K D-Ring Tie Downs Spare Tire Mount 3' Beavertail Universal Full Width Ramps

OPTIONS

Coupler Jack Wheel Upgrades Color Options Contact Your Local Dealer for More Options



SPECIFICATIONS	14000

GVWR (lbs)	14000
GAWR (Ibs/axle)	7000
Curb Weight 15' + 3' (lbs)	2970
Curb Weight 17' + 3' (lbs)	3030
Payload 15' + 3' (lbs)	11030
Payload 17' + 3' (lbs)	10970
Coupler	Adjustable 2-5/16"
Jack	7K Dropleg
Suspension	Slipper Spring
Overall Length/Flat 15' + 3'	23' 9"/16'
Overall Length/Flat 17' + 3'	25' 9"/18'
Between Fenders	81"
Deck Height	24"
Coupler Height	20"

SINGLE AXLE TILT BED EQUIPMENT







Hydraulic Dampener

Sealed Rubber Mounted LED Lights Adjustable Coupler/Setback Jack





SURE-TRAC DIFFERENCE

Tube Construction All LED Lights Torsion Axle (22.5 Deg. Up) Sealed Brake Connections EverLink[™] - High Performance Wiring Harness

FEATURES

Pressure Treated 2 x 6 Decking Hydraulic Dampener

Easy Lube Hubs Torsion Axle White Spoke Wheels 15"/16" Radial Tires Self-Adjust Brakes

7K Dropleg Jack Adjustable 2-5/16" Coupler Tube Full Wrap Tongue HD Diamond Plate Knife Edge Tail Stake Pockets and Rub Rail (4) 5K D-Ring Tie Downs HD Reinforced Tread Plate Fenders Rear Board Retainers

OPTIONS

Coupler Wheel Upgrades A-Frame Toolbox Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	5 x 10, 5K	6.5 x 12, 7K	6.5 x 12 + 4, 7.8K	
GVWR (lbs)	5000	7000	7800	
GAWR (lbs/axle)	5200	7000	8000	
Curb Weight (lbs)	1360	1900	2100	
Payload (lbs)	3640	5100	5700	
Coupler		Adjustable 2-5/16"		
Suspension	Torsion Axle (22.5 Degree Up)			
Electric Plug		— 7-Way Round —		
Length (Overall/Bed)	189.5"/129.5"	214.5"/154.5"	264.5"/204.5"	
Between Fenders	62"	78"	78"	
Deck Height	17"	19"	19"	
Coupler Height	8" - 17"	10" - 19"	10" - 19"	







HD 12K Dropleg Jack -16K Model



New Standard Adjustable Coupler/Setback Jack -14K Model



Slipper Spring Suspension – 14K and Up







SURE-TRAC DIFFERENCE

Tapered Entry for Full Width Loading
All LED Lights
HD Slipper Spring Axle (14K Model)
Sealed Brake Connections
EverLinkTM - High Performance Wiring Harness

FEATURES

Pressure Treated 2 x 6 Decking Hydraulic Dampener

Easy Lube Hubs 4" Drop Axles 15"/16" Radial Tires Self-Adjust Brakes

7K Setback Jack Adjustable 2-5/16" Coupler (14K Model) C-Channel Full Wrap Tongue
HD Diamond Plate Knife Edge Tail
Nested Frame
HD Reinforced Tread Plate Fenders
Rear Board Retainers
Stake Pockets and Rub Rail
(4) 5K D-Ring Tie Downs
Spare Tire Mount

OPTIONS

Coupler
Jack
Electric Tilt
Wheel Upgrades
Color Options
Contact Your Local Dealer for More Options

SPECIFICATIONS	10000	14000	16000
GVWR (lbs)	9900	14000	16000
GAWR (lbs/axle)	5200	7000	8000
Curb Weight 16' (lbs)	2920	3120	3820
Curb Weight 18' (lbs)	3120	3320	4020
Curb Weight 16' +4' (lbs)	3320	3520	4220
Curb Weight 18' +4' (lbs)	3430	3730	4430
Payload 16' (lbs)	6980	10880	12180
Payload 18' (lbs)	6780	10680	11980
Payload 16' +4' (lbs)	6580	10480	11780
Payload 18' +4' (lbs)	6470	10270	11570
Coupler	2-5/16" A-Frame	Adjustable 2-5/16"	Adjustable 4 Bolt Pintle
Electric Plug		— 7-Way Round —	
Length (Overall/Bed) 18'		— 23' 9"/18' 5" —	
Length (Overall/Bed) 18' +4'		— 27' 9"/4' +18' 5" —	
Between Fenders	82"	82"	82"
Deck Height	20"	20"	20"
Coupler Height	18"	Adjustable 2-5/16"	

DECKOVER TRAILERS









LOW PROFILE DECKOVER WITH POP-UP BEAVERTAIL



SURE-TRAC DIFFERENCE

32" Deck Height 4' Pop Up Diamond Plate Beavertail All LED Lights EverLink™ - High Performance Wiring Harness

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

7K Dropleg Jack 5' Fabricated Slide In Steel Ramps Stake Pockets and Rub Rail Spare Tire Mount (6) HD D-Ring Tie Downs

OPTIONS

Coupler Options Jack Options Wheel Options Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	8.5' x 16' + 4'
GVWR (lbs)	9900
GAWR (lbs/axle)	5200
Curb Weight	2620
Payload	7280
Coupler	5 Position Adjustable 2-5/16"
Electric Plug	7-Way Round
Overall Length	292"
Deck Height	32"
Coupler Height	Adjustable 19"-27"


LOW PROFILE FLATBED DECKOVER







Adjustable Coupler





7K Dropleg Jack





SURE-TRAC DIFFERENCE

32" Deck Height All LED Lights EverLink™ - High Performance Wiring Harness

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes

7K Dropleg Jack 8' Steel Fabricated Slide In Ramps (Flatbed)

Stake Pockets and Rub Rail Spare Tire Mount Diamond Plate Deck Over Wheels (6) HD D-Ring Tie Downs

OPTIONS


Coupler Options Jack Options Wheel Options Color Options Contact Your Local Dealer for More Options

FLATBED SPECIFICATIONS	8.5' x 16'	8.5' x 18'	8.5' x 20'	
GVWR (lbs)	9900	9900	9900	
GAWR (lbs/axle)	5000	5000	5000	
Curb Weight (lbs)	2645	2645 2830		
Payload (lbs)	7255	7070	6885	
Coupler	2-5/16" Adjustable Coupler			
Electric Plug	7-Way Round			
Overall Length	20.5'	22.5'	24.5'	
Deck Height	32"	32"	32"	
Coupler Height	Adjustable 19"-27"			

8' Steel Fabricated Slide In Ramps

SURE-TRAC

LOW PROFILE BEAVERTAIL DECKOVER

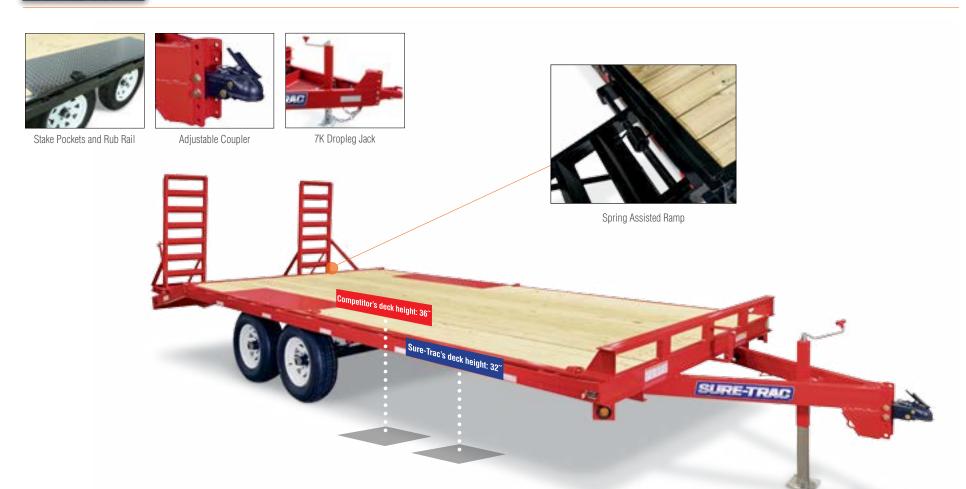

SURE-TRAC DIFFERENCE

32" Deck Height Spring Assist Ramps All LED Lights EverLink™ - High Performance Wiring Harness

FEATURES

Gel Filled Electrical Connectors Pressure Treated 2 x 6 Decking

Easy Lube Hubs 15" Radial Tires Self-Adjust Brakes 7K Dropleg Jack 5' Standup Ramps Stake Pockets and Rub Rail Spare Tire Mount Diamond Plate Deck Over Wheels (6) HD D-Ring Tie Downs

OPTIONS

Coupler Options
Jack Options
Wheel Options
Color Options
Contact Your Local Dealer for More Options

BEAVERTAIL SPECIFICATIONS 8.5' x 15' +3' 8.5' x 17' +3'

GVWR (Ibs)	9900	9900	
GAWR (lbs/axle)	5000	5000	
Curb Weight (lbs)	2720 2800		
Payload (lbs)	7180 7100		
Coupler	2-5/16" Adjustable Coupler		
Electric Plug	7-Way Round		
Overall Length	22.5' 24.5'		
Deck Height	32"	32"	
Coupler Height	Adjustable 19"-27"		

HD LOW PROFILE BEAVERTAIL DECKOVER



HD Stake Pockets, Rub Rail and Chain Spool



Cross Trac Bracing 4X Stronger



Slipper Spring Suspension 14K and Up



Side Step



Shown with Optional

Pop-Up Center Plate

New Standard Pierced Frame for Lower Deck Height

SURE-TRAC DIFFERENCE

Pierced I-Beam Frame

Cross Trac Bracing, Four Times Stronger than Torque Tube All LED Lights

Everlink™ - High Performance Wiring Harness Sealed Brake Connections Undercoated Main Frame

FEATURES

Pressure Treated 2 x 6 Decking

Oil Filled Hubs (Tandem Dual) Slipper Springs 16" Radial Tires Self-Adjust Brakes

HD 12K Dropleg Jack Spring Assist Flip Over Ramps (Beavertail) Tube Constructed Bumper Spare Tire Carrier HD Stake Pockets and Rub Rail (8) HD D-Rings Chain Spools

Ramps

Decking





Side Steps



Gooseneck

Spare Tire

Contact Your Local Dealer for More Options





1010	17.010	LLION	201111	20.01	OUIL
		8.5' x	8.5' x 20' + 5'		
		Pir	ntle		
15000	17600	22500	23100	25900	30000
7000	8000	10000	7000	12000	16000
4640	4740	5540	5720	5840	6210
4930	5030	5800	5980	6100	6520
10360	12860	16960	17380	20060	23790
10070	12570	16700	17120	19800	23480
5 Pos. Adj. Pintle		Adjustable 4 Bolt Pintle			
		Adjustable	2-5/16" Ball —		
		Center Mounte	ed 12K Dropleg		
		Dual HD 12K Ja	cks with Toolbox		
		Slipper	Spring —		
378"	378"	378"	378"	378"	378"
426"	426"	426"	426"	426"	426"
32"	32"	32"	32"	32"	32"
		Adjustable 21"- 29"			
		Adjustable	31"- 39 3/4"		
	15000 7000 4640 4930 10360 10070 5 Pos. Adj. Pintle	15000 17600 7000 8000 4640 4740 4930 5030 10360 12860 10070 12570 5 Pos. Adj. Pintle	8.5' x Pir 15000 17600 22500 7000 8000 10000 4640 4740 5540 4930 5030 5800 10360 12860 16960 10070 12570 16700 5 Pos. Adj. Pintle Adjustable Center Mounte Dual HD 12K Ja Slipper 378" 378" 378" 426" 426" 426" 32" 32" 32" Adjustatle	8.5' x 20' + 5' Pintle 15000 17600 22500 23100 7000 8000 10000 7000 4640 4740 5540 5720 4930 5030 5800 5980 10360 12860 16960 17380 10070 12570 16700 17120 5 Pos. Adj. Pintle Adjustable 2-5/16" Ball Center Mounted 12K Dropleg Dual HD 12K Jacks with Toolbox Slipper Spring 378" 378" 378" 378" 378" 426" 426" 426" 426" 32" 32" 32" 32" 32"	8.5' x 20' + 5' Pintle 15000 17600 22500 23100 25900 7000 8000 10000 7000 12000 4640 4740 5540 5720 5840 4930 5030 5800 5980 6100 10360 12860 16960 17380 20060 10070 12570 16700 17120 19800 5 Pos. Adj. Pintle Adjustable 4 Bolt Pintle Adjustable 2-5/16" Ball Center Mounted 12K Dropleg Dual HD 12K Jacks with Toolbox Slipper Spring 378" 378" 378" 378" 378" 378" 426" 426" 426" 426" 426" 32" 32" 32" 32" 32" 32" Adjustable 21"- 29"









Slipper Spring Suspension All LED Lights Everlink™ - High Performance Wiring Harness Sealed Brake Connections Undercoated Main Frame

FEATURES

Pressure Treated 2 x 6 Decking Deep Cycle Marine Grade Battery 110 Volt Battery Charger

Oil Filled Hubs (Tandem Dual) 16" Radial Tires Slipper Springs Self-Adjust Brakes

HD 12K Dropleg Jack Spare Tire Carrier HD Stake Pockets and Rub Rail (6) HD D-Rings Chain Spools Side Steps

OPTIONS

Gooseneck Battery Charger Decking Spare Tire Contact Your Local Dealer for More Options

		Carried States						
SPECIFICATIONS	15000	15000	17600	17600	22500	22500	25900	25900
Deck Size (ft)	8.5' x 22'	8.5' x 22' + 4'	8.5' x 22'	8.5' x 22' + 4'	8.5' x 24'	8.5' x 24' + 4'	8.5' x 24'	8.5' x 24' + 4'
Coupler Type				Pi	ntle			
GVWR (Ibs)	15000	15000	17600	17600	22500	22500	25900	25900
GAWR (Ibs/axle)	7000	7000	8000	8000	10000	10000	12000	12000
Curb Weight (lbs) - Bumper Pull	4485	4785	4825	5125	6080	6480	6220	6620
Curb Weight (lbs) - Gooseneck	4775	5075	5115	5415	6340	6740	6480	6880
Payload (lbs) - Bumper Pull	10515	10215	12775	12475	16420	16020	19680	19280
Payload (lbs) - Gooseneck	10225	9925	12485	12185	16160	15760	19420	19020
Coupler - Bumper Pull	5 Pos. A	djustable Pintle			- Adjustab	le 4 Bolt Pintle –		
Coupler - Gooseneck				Adjustable 2-5/16" Ball				
Jack - Bumper Pull				- Center Mounte	ed 12K Drople	eg —		
Jack - Gooseneck				Dual HD 12K Jac	cks with Tool	00X ———————————————————————————————————		
Suspension				Slipper L	eaf Spring –			
Overall Length - Bumper Pull	330"	378"	330"	378"	354"	402"	354"	402"
Overall Length - Gooseneck	378"	426"	378"	426"	402"	450"	402"	450"
Deck Height	34"	34"	34"	34"	34"	34"	34"	34"
Coupler Height - Bumper Pull				Adjustab	le 19"- 27" -			
Coupler Height - Gooseneck				Adjustable	31"- 39 3/4"			
Hydraulic Hoist		Dual Ram (Power	r Up/Power D	own) —		Scissor (Power L	Jp/Power Dov	vn)
·		•				,		

SURE-TRAC

Shown with Optional Heavy Duty

I-Beam Gooseneck

Shown with Color Option Red

HD LOW PROFILE DECKOVER WITH HYDRAULIC BEAVERTAIL





Protected Pump



Self-Retained Latch Pin



New Standard 110 Volt Battery Charger





Lower Deck Height

NEW



SURE-TRAC DIFFERENCE

Pierced I-Beam Frame HD I-Beam Gooseneck All LED Lights Everlink™ - High Performance Wiring Harness Sealed Brake Connections Undercoated Main Frame

FEATURES

Pressure Treated 2 x 6 Decking 110 Volt Battery Charger

Oil Filled Hubs (Tandem Dual) 16" Radial Tires Slipper Springs Self-Adjust Brakes

Dual HD 12K Drop Leg Jacks Toolbox Between Uprights on Gooseneck HD 5" Bore Twin Lift Cylinders in Beavertail Spare Tire Carrier HD Stake Pockets and Rub Rail (8) HD D-Rings Chain Spools Side Steps

OPTIONS

Brake Options Battery Charger Spare Tire Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS	22500	25900	30000		
Deck Size (ft)		- 8.5' x 20' +10' —			
GVWR (lbs)	22500	25900	30000		
GAWR (Ibs/axle)	10000	12000	16000		
Curb Weight (lbs)	6520	6680	7580		
Payload (lbs)	15980	19220	22420		
Coupler		2-5/16" Gooseneck			
Suspension		Slipper Leaf Spring			
Electric Plug		– 7-Way Round –			
Overall Length	497"	497"	497"		
Deck Height	36"	36"	36"		
Coupler Height	Adjustable 31"- 39-3/4"				
Beavertail Payload	5000 lbs				
Beavertail Lifting Capacity	3000 lbs. (Center of Tail)				
Load Angle		— 15 Degrees —			







HD 1" D-Rings



Fabricated Steel Bulkhead





Hi-Tensile Steel Construction
Pierced I-Beam Frame
Hutch H-9700 Suspension
All LED Lights
EverlinkTM - High Performance Wiring Harness
Undercoated Main Frame

FEATURES

2" Nominal Oak Decking

Oil-Bath Axles 17.5" Radial Tires Self Adjusting Brakes

Dual 25K 2-Speed Jacks Steel Plated Tongue 5' Bi-Directional, Fold Flat Spring Assisted Wood-Filled Ramps Fabricated Bulkhead Lockable Toolbox in Tongue Spare Tire Carrier Step-On Tongue (Driver's Side) (8) 1" D-Rings Safety Chains (5/8" High Test)

OPTIONS

Air Ride Suspension
Fifth Wheel
Decking Option
Contact Your Local Dealer for More Options

SPECIFICATIONS	49000	61000	
Deck Size (ft)	8.5' x 20' +5'	8.5' x 24' +5'	
GVWR (lbs)	49000	61000	
GAWR (lbs/axle)	20000	20000	
Curb Weight (lbs)	9450	11300	
Payload (lbs)	39550	49700	
Coupler	66K Pintle Eye		
Suspension	— Hutch H-9700 Suspension		
Electric Plug	7-Way Cold Temperature Semi-Style P		
Overall Length	31' 6"	35' 6"	
Deck Height - Std Model	34.25"	34.25"	
Coupler Height	Adjustab	le 21"-29"	

Talk to your Sure-Trac dealer for a complete list of all options available for your trailer. No additional lead time on standard options.



DECKING



BEAVERTAIL DECKOVER - UNIVERSAL FULL WIDTH RAMPS



HD REINFORCED LANDSCAPE GATE



7K DROPLEG JACK



HD 12K DROPLEG JACK



A-FRAME TONGUE TOOL BOX



ADDITIONAL D-RINGS



HD CONTRACTORS GATE



I-BEAM GOOSENECK HITCH



ALUMINUM WHEELS



HEAVY DUTY SPRING ASSIST SPLIT GATE



LANDSCAPE BASKET



Standard -

Red

Yellow

Optional Colors





Not exact color match. Contact your dealer for color samples.

Blue

Gray

ENCLOSED TRAILERS









ENCLOSED TRAILERS - THE SURE-TRAC DIFFERENCE

*Features Based on Tandem Axle Models



6'6" Interior Height* Extra head room and loading height means more cargo capacity.



Fully Cured Undercoating Oven-cured automotive grade rubberized undercoating provides the ultimate frame protection and corrosion resistance.



New Standard Silver Thermo-Sheath® Ceiling Liner Finished look that provides additional roof support.



Aluminum Wheels Professional appearance and enhanced corrosion resistance.



Full-Face Smooth Aluminum Exterior Runs top to bottom, providing a second layer of protection behind ATP stoneguard.



Polyethylene Vapor Barrier Protects your Sure-Trac trailer from moisture penetration.



Aluminum Door Hold Back and 3" Trim Door holders withstand cold temperatures, giving you a secure hold in any condition. The 3" bottom trim provides enhanced durability.





SURE-TRAC PRO SERIES WEDGE CARGO



Chrome Plated Door Hardware



Drip Rail



Flow Through Vents



New Standard Silver Thermo-Sheath® Ceiling Liner





3 Year Structural Limited Warranty 6'6" Interior Height 3/4" Engineered Wood Flooring Fully Cured Undercoating Polyethylene Vapor Barrier Aluminum Door Hold Back 3" Exterior Trim Aluminum Wheels LED Interior Dome Lights Color Matched Screws

FEATURES

Easy Lube Hubs 4" Drop Axles 15" Radial Tires Self-Adjust Brakes

Zinc Plated Jack 6" Tube Frame and Tongue

16" On-Center C-Channel Cross Members Tube Roof Bows

All LED Lights 3/8" Plywood Walls .030 Aluminum Exterior Bright Front Nose Cap Bright Rear Hoop Seamless Aluminum Roof 32" RV Side Door 2,250 lb. HD Ramp Door with Wood Flap Silver Thermo-Sheath® Ceiling Liner

OPTIONS

10K, 14K and 16K Models Barn Doors Electrical Options Color Options Contact Your Local Dealer for More Options



STANDARD COLORS



Black



White



Pewter



Charcoal



Silver

Frost



OPTIONAL COLORS

Multiple

11 401	71 - 401	71 00

SPECIFICATIONS	6' x 10'	6' x 12'	7' x 12'	7' x 14'	7' x 16'	7' x 18'	7' x 20'
GVWR (lbs)	2990	2990	7000	7000	7000	7000	7000
GAWR (lbs/Axle)	3500	3500	3500	3500	3500	3500	3500
Curb Weight (lbs)	1240	1390	1900	2040	2120	2220	2300
Payload (lbs)	1750	1600	5100	4960	4880	4780	4700
Electric Plug	4-Way	Plug ——		7-Way Round			
Overall Length	14' 5"	16' 5"	16' 5"	18' 5"	20' 5"	22' 5"	24' 5"
Overall Width	92"	92"	102"	102"	102"	102"	102"
Overall Height	93"	93"	101"	101"	101"	101"	101"
Interior Height	72.5"	72.5"	78"	78"	78"	78"	78"
Interior Width	69"	69"	81"	81"	81"	81"	81"
Interior Length	10' 9"	12' 9"	12' 9"	14' 9"	16' 9"	18' 9"	20' 9"
Floor Height	18"	18"	21"	21"	21"	21"	21"





PRO SERIES ROUND TOP CARGO



SURE-TRAC DIFFERENCE

3 Year Structural Limited Warranty 6'6" Interior Height 3/4" Engineered Wood Flooring Fully Cured Undercoating Polyethylene Vapor Barrier Aluminum Door Hold Back 3" Exterior Trim Aluminum Wheels LED Interior Dome Lights Color Matched Screws

FEATURES

Easy Lube Hubs 4" Drop Axles 15" Radial Tires Self-Adjust Brakes

Zinc Plated Jack 6" Tube Frame and Tongue 16" On-Center Tube Wall Studs 16" On-Center C-Channel Cross Members Tube Roof Bows

All LED Lights 3/8" Plywood Walls .030 Aluminum Exterior **Bright Front Corners** Bright Rear Hoop .080 Aluminum Roof Cove Seamless Aluminum Roof 32" RV Side Door 2,250 lb. HD Ramp Door with Wood Flap Silver Thermo-Sheath® Ceiling Liner

OPTIONS

10K, 14K and 16K Models Barn Doors Electrical Options Color Options Contact Your Local Dealer for More Options



STANDARD COLORS



Black



White



Pewter



Frost



OPTIONAL COLORS

ı	M	ul	ti	ļ
---	---	----	----	---

SPECIFICATIONS	7'x 12'	7' x 14'	7' x 16'	7' x 18'	7' x 20'
GVWR (lbs)	7000	7000	7000	7000	7000
GAWR (lbs/axle)	3500	3500	3500	3500	3500
Curb Weight (lbs)	1900	2040	2120	2220	2300
Payload (lbs)	5100	4960	4880	4780	4700
Electric Plug			7-Way Round		
Overall Length	16' 5"	18' 5"	20' 5"	22' 5"	24' 5"
Overall Width	102"	102"	102"	102"	102"
Overall Height	104"	104"	104"	104"	104"
Interior Height	80"	80"	80"	80"	80"
Interior Width	81"	81"	81"	81"	81"
Interior Length	12' 9"	14' 9"	16' 9"	18' 9"	20' 9"
Floor Height	21"	21"	21"	21"	21"





PRO SERIES WEDGE FRONT CAR HAULER



Aluminum Wheels



Aluminum Door Hold Back




4 D-Rings Standard



New Standard Silver Thermo-Sheath® Ceiling Liner





3-Year Structural Limited Warranty
6'6" Interior Height
3/4" Engineered Wood Flooring
Fully Cured Undercoating
Polyethylene Vapor Barrier
Aluminum Door Hold Back
3" Exterior Trim
Aluminum Wheels
LED Interior Dome Lights
Color Matched Screws

FEATURES

Easy Lube Hubs 4" Drop Axles 15" Radial Tires Self-Adjust Brakes Zinc Plated Jack 6" Tube Frame and Tongue 16" On-Center Tube Wall Studs 16" On-Center C-Channel Cross Members Tube Roof Bows 48" Beavertail

All LED Lights
3/8" Plywood Walls
(4) 5K D-Rings
.030 Aluminum Exterior
Bright Front Nose Cap
Bright Rear Hoop
Seamless Aluminum Roof
48" RV Side Door
4,100 lb. HD Ramp Door with Wood Flap
Silver Thermo-Sheath® Ceiling Liner

OPTIONS

10K, 14K and 16K Models Electrical Options Color Options Contact Your Local Dealer for More Options

STANDARD COLORS



Black



White



Pewter





Frost



Multiple

OPTIONAL COLORS

SPECIFICATIONS 8.5' x 18' 8.5' x 20' 8.5' x 18' 8.5' x 20' 8.5' x 24'

Charcoal

GVWR (lbs)	7000	7000	9900	9900	9900	
GAWR (lbs/Axle)	3500	3500	5200	5200	5200	
Curb Weight (lbs)	3250	3425	3450	3600	3900	
Payload (lbs)	3750	3575	6450	6300	6000	
Electric Plug	7-Way Round					
Overall Length	22' 9"	24' 9"	22' 9"	24' 9"	28' 9"	
Overall Width	102"	102"	102"	102"	102"	
Overall Height	101"	101"	101"	101"	101"	
Interior Height	78"	78"	78"	78"	78"	
Interior Width	97"	97"	97"	97"	97"	
Interior Length	19' 1"	21' 1"	19' 1"	21' 1"	25' 1"	
Floor Height	21"	21"	21"	21"	21"	



PRO SERIES ROUND TOP CAR HAULER





3-Year Structural Limited Warranty 6'6" Interior Height 3/4" Engineered Wood Flooring Fully Cured Undercoating Polyethylene Vapor Barrier Aluminum Door Hold Back 3" Exterior Trim LED Interior Dome Lights Aluminum Wheels Color Matched Screws

FEATURES

Easy Lube Hubs 4" Drop Axles 15" Radial Tires Self-Adjust Brakes Zinc Plated Jack 6" Tube Frame and Tongue 16" On-Center Tube Wall Studs 16" On-Center C-Channel Cross Members Tube Roof Rows 48" Beavertail

All LED Lights 3/8" Plywood Walls (4) 5K D-Rings .030 Aluminum Exterior Bright Front Corners Bright Rear Hoop Seamless Aluminum Roof 48" RV Side Door 4,100 lb. HD Ramp Door with Wood Flap Silver Thermo-Sheath® Ceiling Liner

OPTIONS

10K. 14K. and 16K Models Electrical Options Color Options Contact Your Local Dealer for More Options



STANDARD COLORS



Black



White



Pewter





Frost



OPTIONAL COLORS

Multiple

SPECIFICATIONS 8.5' x 18' 8.5' x 20' 8.5' x 18' 8.5' x 20' 8.5' x 24'

Charcoal

GVWR (lbs)	7000	7000	9900	9900	9900		
GAWR (lbs/Axle)	3500	3500	5200	5200	5200		
Curb Weight (lbs)	3250	3425	3450	3600	3900		
Payload (lbs)	3750	3575	6450	6300	6000		
Electric Plug	7-Way Round						
Overall Length	22' 9"	24' 9"	22' 9"	24' 9"	28' 9"		
Overall Width	102"	102"	102"	102"	102"		
Overall Height	104"	104"	104"	104"	104"		
Interior Height	78"	78"	78"	78"	78"		
Interior Width	97"	97"	97"	97"	97"		
Interior Length	18' 6"	20' 6"	18' 6"	20' 6"	24' 6"		
Floor Height	21"	21"	21"	21"	21"		



SURE-TRAC

CONTRACTOR PRO BULLNOSE CARGO TRAILER









Barlock Add-on



Integrated Transition



Ladder Platform



Shown with Optional Tool Crib



Shown with Barn Doors

STANDARD COLORS



Black



White



Pewter





Frost



OPTIONAL COLORS

Multiple

SURE-TRAC DIFFERENCE

3-Year Structural Limited Warranty 6'6" Interior Height 3/4" Engineered Wood Flooring Fully Cured Undercoating Polyethylene Vapor Barrier Aluminum Door Hold Back 3" Exterior Trim LED Interior Dome Lights Aluminum Wheels Color Matched Screws

FEATURES

Easy Lube Hubs Torsion Axle 15" Radial Tires Self-Adjust Brakes

Adjustable Coupler 7K Dropleg Jack 6" Tube Frame and Tongue 16" On-Center Tube Wall Studs X-Braced Walls and Gussets on Wall Posts and Corner Gussets 12" On-Center C-Channel Cross Members 16" On-Center Tube Roof Bows

All LED Lights 3/8" Plywood Walls Silver Thermo-Sheath® Ceiling Liner .030 Aluminum Exterior Bright Front Corners Bright Rear Hoop Seamless Aluminum Roof

(3) Ladder Racks with Front Mounted Access Ladder 32" RV Side Door with Barlock

4,100 lb. HD Ramp Door with Integrated Transition (8.5 Wide Models)

OPTIONS

More Sizes and GVWR Available **Electrical Options** Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS 7' x 14' 7' x 16' 8.5' x 16' 8.5' x 18' 8.5' x 20' 8.5' x 24' GVWR (lbs) 9900 9900 9900 9900 9900 9900 5200 5200 5200 5200 5200 GAWR (lbs/Axle) 5200 3030 3570 3795 4020 4420 Curb Weight (lbs) 3110 Payload (lbs) 6870 6790 6330 6105 5880 5480 Coupler Adjustable 2-5/16" **Electric Plug** 7-Way Round 19" 21" Overall Length 21" 23" 25" 29" Overall Width 102" 102" 102" 102" 102" 102" **Overall Height** 104" 104" 104" 104" 104" 104" Interior Height 78" 78" 78" 78" 78" 78" Interior Width 81" 81" 97" 97" 97" 97" 174" 294" **Interior Length** 198" 198" 222" 246" Floor Height 21" 21" 21" 21" 21" 21"

LANDSCAPE PRO ROUND TOP ENCLOSED CARGO












Wood Shelves



Trimmer Racks

Integrated Transition



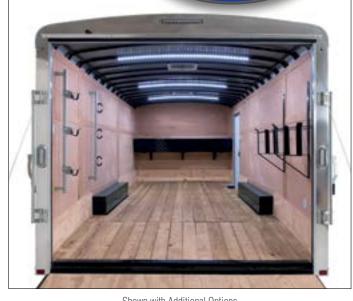

Shown with Additional Options

STANDARD COLORS



Black



White



Pewter





Frost



Multiple

SURE-TRAC DIFFERENCE

3-Year Structural Limited Warranty 6'6" Interior Height 3/4" Pressure Treated Plywood Flooring Fully Cured Undercoating Polyethylene Vapor Barrier Aluminum Door Hold Back 3" Exterior Trim LED Interior Dome Lights Aluminum Wheels Color Matched Screws

FEATURES

Easy Lube Hubs Torsion Axle 15" Radial Tires Self-Adjust Brakes Adjustable Coupler 7K Dropleg Jack 6" Tube Frame and Tongue 16" On-Center Tube Wall Studs X-Braced Walls and Gussets on Wall Posts and Corner Gussets 12" On-Center C-Channel Cross Members

All LED Lights 3/8" Plywood Walls 3/4" x 12" Plywood Kickpanel Silver Thermo-Sheath® Ceiling Liner 48" Posts with (3) TB-01 Gridiron Trimmer Brackets .030 Aluminum Exterior Bright Front Corners

16" On-Center Tube Roof Bows

Bright Rear Hoop Seamless Aluminum Roof (2) Non-Powered Roof Vents 32" RV Side Door with Barlock 5,250 lb. Super Duty Ramp Door with Integrated Transition (8.5 Wide Models) Wood Shelves

OPTIONS

More Sizes and GVWR Available Electrical Options Color Options Contact Your Local Dealer for More Options

SPECIFICATIONS 7' x 14' 7' x 16' 8.5' x 16' 8.5' x 18' 8.5' x 20' 8.5' x 24' 9900 GVWR (lbs) 9900 9900 9900 9900 9900 5200 5200 5200 5200 5200 5200 GAWR (lbs/Axle) 4030 4255 4480 4080 Curb Weight (lbs) 3065 3145 Payload (lbs) 6835 6755 5870 5645 5420 5320 Coupler Adjustable 2-5/16" **Electric Plug** 7-Way Round 19" 21" 25" 29" Overall Length 21" 23" Overall Width 102" 102" 102" 102" 102" 102" 104" 104" 104" 104" 104" 104" **Overall Height** Interior Height 78" 78" 78" 78" 78" 78" Interior Width 81" 81" 97" 97" 97" 97" Interior Length 168" 192" 192" 216" 240" 288" Floor Height 21" 21" 21" 21" 21" 21"



51

Talk to your Sure-Trac dealer for a complete list of all options available for your trailer. No additional lead time on standard options.



STEEL TRANSITION



ATP EXTERIOR PACKAGE



SPARE TIRE MOUNT



ADJUSTABLE COUPLER



2 X 6 DECKING



TOOL STORAGE



LED LOADING LIGHT



5000 LB D-RINGS



E-TRACK TIE-DOWNS AND ATP KICKPLATE



BI-DIRECTIONAL VENT




WHITE CEILING LINER



CONCESSION DOOR



WELCOME TO SURE-TRAC CUSTOM TRAILER OPERATIONS (CTO)

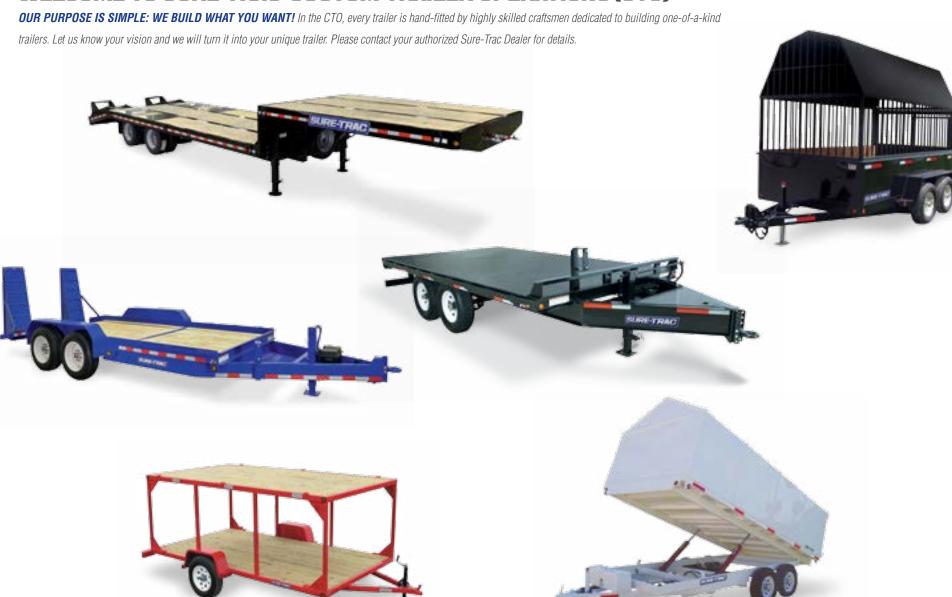











We live and work in Indiana, the heart of farm country and the center of American manufacturing. Here, values matter.

Novae Corp. started making trailers in January 2001 with the idea to offer quality products with great service, deal fairly with people, and recognize that suppliers, employees, community and customers are all important to success. Our purpose is to create opportunities for people to make their lives better and to leave a legacy of positive impact.

- Good character
- A strong work ethic
- A service mindset
- Accountability
- A drive to improve



Living these values, we have become one of the best professional trailer manufacturers in North America. Your support has rewarded us with 16 years of continuous growth; for that, we are truly grateful. Thank you! We look forward to serving you for many years to come.









You take risks, get your hands dirty, and succeed through hard work, persistence and determination. We get it. You are an inspiration to us all.

Sure-Trac, Professional Reliability matters.



THE TRAILER BOOK NO. 17

sure-trac.com









This document is provided for informational purposes only. Pictures, illustrations and text may include options and accessories not available at all times or as standard equipment. Contact your local dealer for exact specifications. All specifications are subject to change without notice. All trademarks, service marks, trade names, trade dress, product names and logos appearing in this document are the property of their respective owners. Novae Corp.® and Sur-Tacc® are registered trademarks, and the blue, silver and orange color combinations are trademarks of Novae Corporation. All rights reserved.



AUTHORIZED SURE-TRAC DEALER

Visit us at Sure-trac.com

