


WILDWOOD 25ICE FLOORPLAN

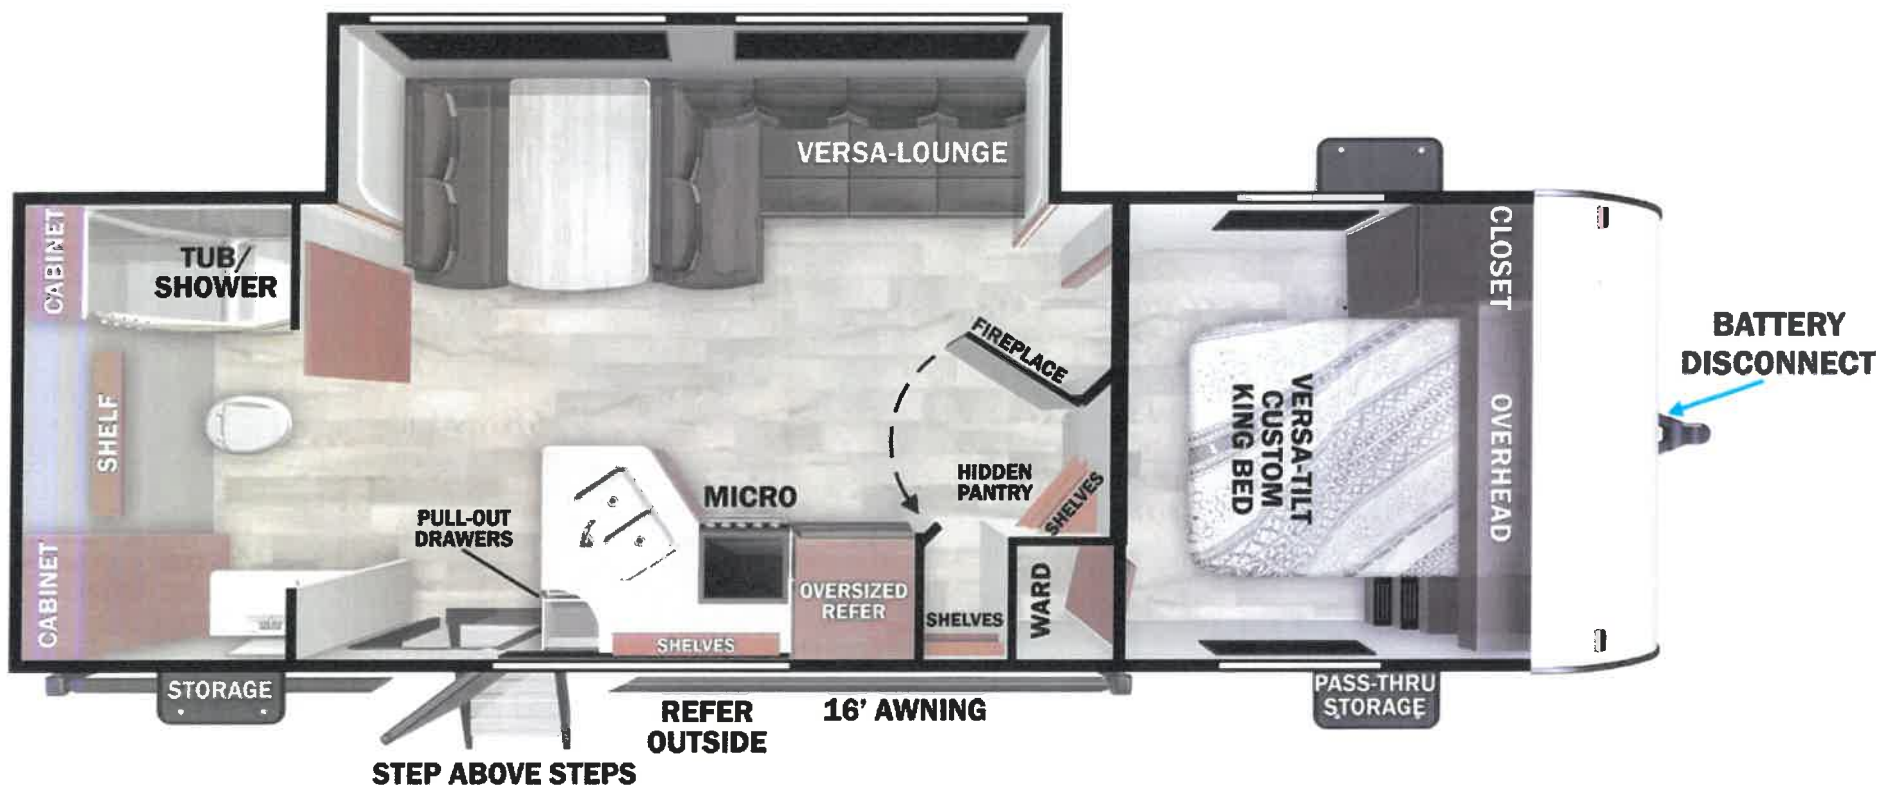

Hitch Weight	735 lb.	GVWR	7,735 lb.
UVW	6,178 lb.	CCC	1,557 lb.
Exterior Length	29' 10"	Exterior Height	10' 3"
Exterior Width	96"	Fresh Water	40 gal.
Gray Water	60 gal.	Black Water	30 gal.

SPECIFICATIONS DEFINITIONS

GVWR (Gross Vehicle Weight Rating) – is the maximum permissible weight of the unit when fully loaded. It includes all weights, inclusive of all fluids, cargo, optional equipment and accessories. For safety and product performance do NOT exceed the GVWR.

GCWR (Gross Combined Weight Rating) – is the maximum permissible loaded weight of your motor home and any towed trailer or towed vehicle. Actual GCWR of this vehicle may be limited by the sum of the GVWR and the installed hitch receiver maximum capacity rating; see hitch rating label for detail.

GAWR (Gross Axle Weight Rating) – is the maximum permissible weight, including cargo, fluids, optional equipment and accessories that can be safely supported by a combination of all axles.

UVW (Unloaded Vehicle Weight)* – is the typical weight of the unit as manufactured at the factory. It includes all weight at the unit's axle(s) and tongue or pin and LP Gas. The UVW does not include cargo, fresh potable water, additional optional equipment or dealer installed accessories.

*Estimated Average based on standard build optional equipment.

CCC (Cargo Carrying Capacity) ** – is the amount of weight available for fresh potable water, cargo, additional optional equipment and accessories. CCC is equal to GVWR minus UVW. Available CCC should accommodate fresh potable water (8.3 lbs per gallon). Before filling the fresh water tank, empty the black and gray tanks to provide for more cargo capacity.

**Estimated Average based on standard build optional equipment.

Each Forest River RV is weighed at the manufacturing facility prior to shipping. A label identifying the unloaded vehicle weight of the actual unit and the cargo carrying capacity is applied to every Forest River RV prior to leaving our facilities.

The load capacity of your unit is designated by weight, not by volume, so you cannot necessarily use all available space when loading your unit.

Actual towing capacity is dependent upon your particular loading and towing circumstances, which includes the GVWR, GAWR and GCWR as well as adequate trailer brakes. Please refer to the Operator's Manual of your vehicle for further towing information.

Note: Specifications are subject to change without notice.

NEW FEATURES

- Retro/Metal Redesign
- 4K Blade Lighting
- JBL Speakers – Interior/Exterior (Interior only on 26ICE)
- 4K Awning Blade Lighting
- TFL Cabinet Doors
- Heavy Duty Cabinet Hinges
- Fold-Out Trash Can (N/A 171RBXL, 19DBXL, 261BHXL, 25ICE, 26ICE)
- Versa-Range
- Stylish Backsplash Update
- Luminous Arched Radius Panels
- Expanded Kitchen Window
- Stylish Roller Shades
- Elegant Curtain Rods and Curtains
- Sleek Single Bowl Sink
- Pet Step in Bedroom
- Backlit Arched Radius Bathroom Mirror
- Revamped Bedroom Layout
- Enhanced Floating Shelves
- TFL Black Walnut Entertainment Shelf
- Pre-Installed TV Brackets (Living Area & Exterior)

BEST IN CLASS:

- Versa Furniture
- Stow N Go Storage Solution
- MORryde™ StepAbove Double Step (Entry Door)
- TFL Cabinet Doors
- Roof Mount Solar Prep
- Adjustable Textured Roller Shades
- Enclosed Accessibelly
- Backlit Radius Bathroom Mirror
- Built-In Laundry Hamper in Bedroom
- Back-Up Camera Prep
- JBL Stereo
- Exterior Accent Lighting
- Dimmable Interior LED “Blade Lighting” (Living Area)
- LED “Blade Lighting” Under Awning
- 60K On-Demand Tankless Water Heater
- 5/8” Tongue & Groove Plywood Floor
Decking
- Tufflex™ PVC Roofing
- Powder Coated I-Beam Frame
- 3/8” Roof Decking (Walk-On)
- Cambered Chassis
- Nitrogen Filled Tires
- 2” Wall Construction
- 16” (or less) on Center
- Aerodynamic Front Radius Profile
- .040 Smooth Aluminum Front Cap
- 5” Bowed Truss Roof Rafters
- 2” x 2” Floor Joists 12” on Center
- Triple Seal Slide-Out System

- 13 Ply Cross Micro-Laminated Beam Header Above Slide-Out
- Seamless Holding Tanks
- Color Coded Water Lines

OPTIONS:

- Spare Tire & Carrier
- Power Stabilizer Jacks
- 15,000 BTU Ducted A/C IPO Standard 13.5k
- Outside Shower
- 200W Solar Panel w/30AMP Controller